




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

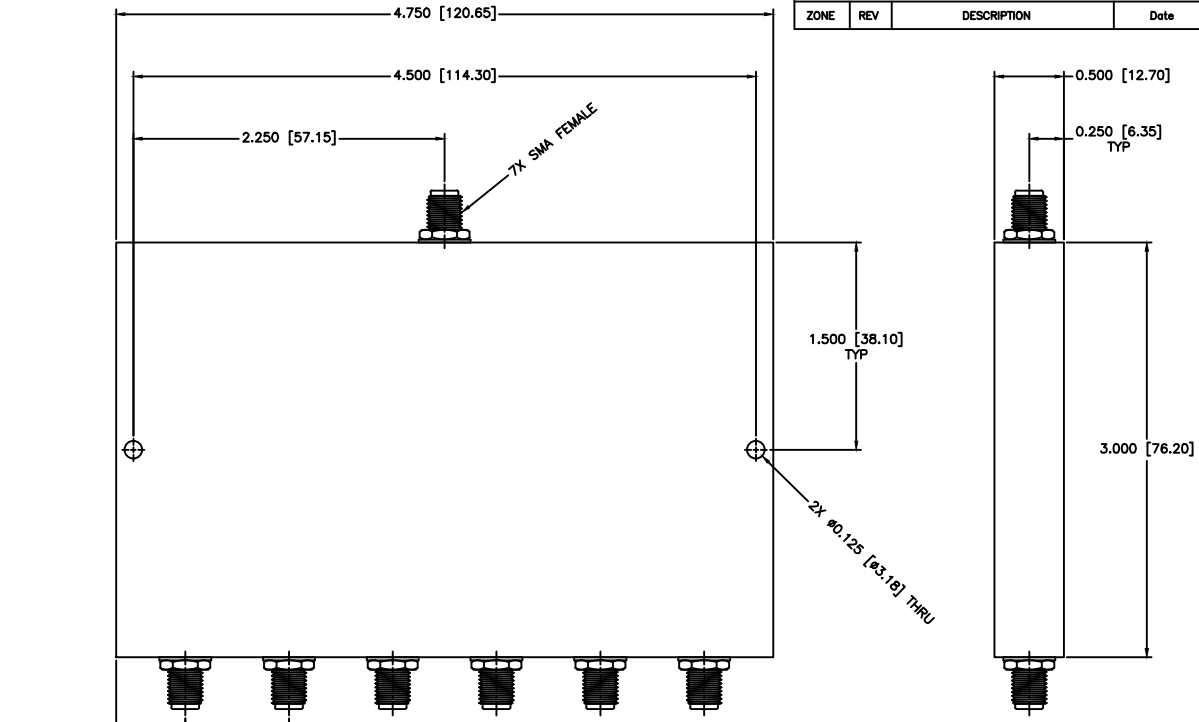

SPECIFICATIONS
 Frequency Range: 50–1000 MHz
 Isolation: 23dB Min.
 Insertion Loss: 1.5dB Max.
 Amplitude Balance: ± 0.5 dB Max.
 Phase Balance: ± 8 dB Max.
 VSWR: 1.30:1 Max.
 Power: 1W Max. \odot Load vswr 1.2

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 06-11-2014
APPROVED: T. Nguyen	DATE: 06-11-2014

MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8118 RINGUP/WWW.MCL.COM	SCALE: N/A
	SHEET: N/A
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 6-WAY POWER DIVIDERS
DRAWING NOTES: SEE COMMENTS OF THE NUMBER IN PARENTHESES AND SHALL NOT BE USED AS INDICATED UNLESS SPECIFIC COMMENTS OR DIMENSIONS ARE SHOWN (DIMENSIONS IN IN.)	PART NO. PL6-4
CAGE CODE: 0D2L5	SIZE: N/A REV: A DWG NO. 82373
DO NOT SCALE THE DRAWING	

