


ZONE		REV	DESCRIPTION	DATE	APPROVED

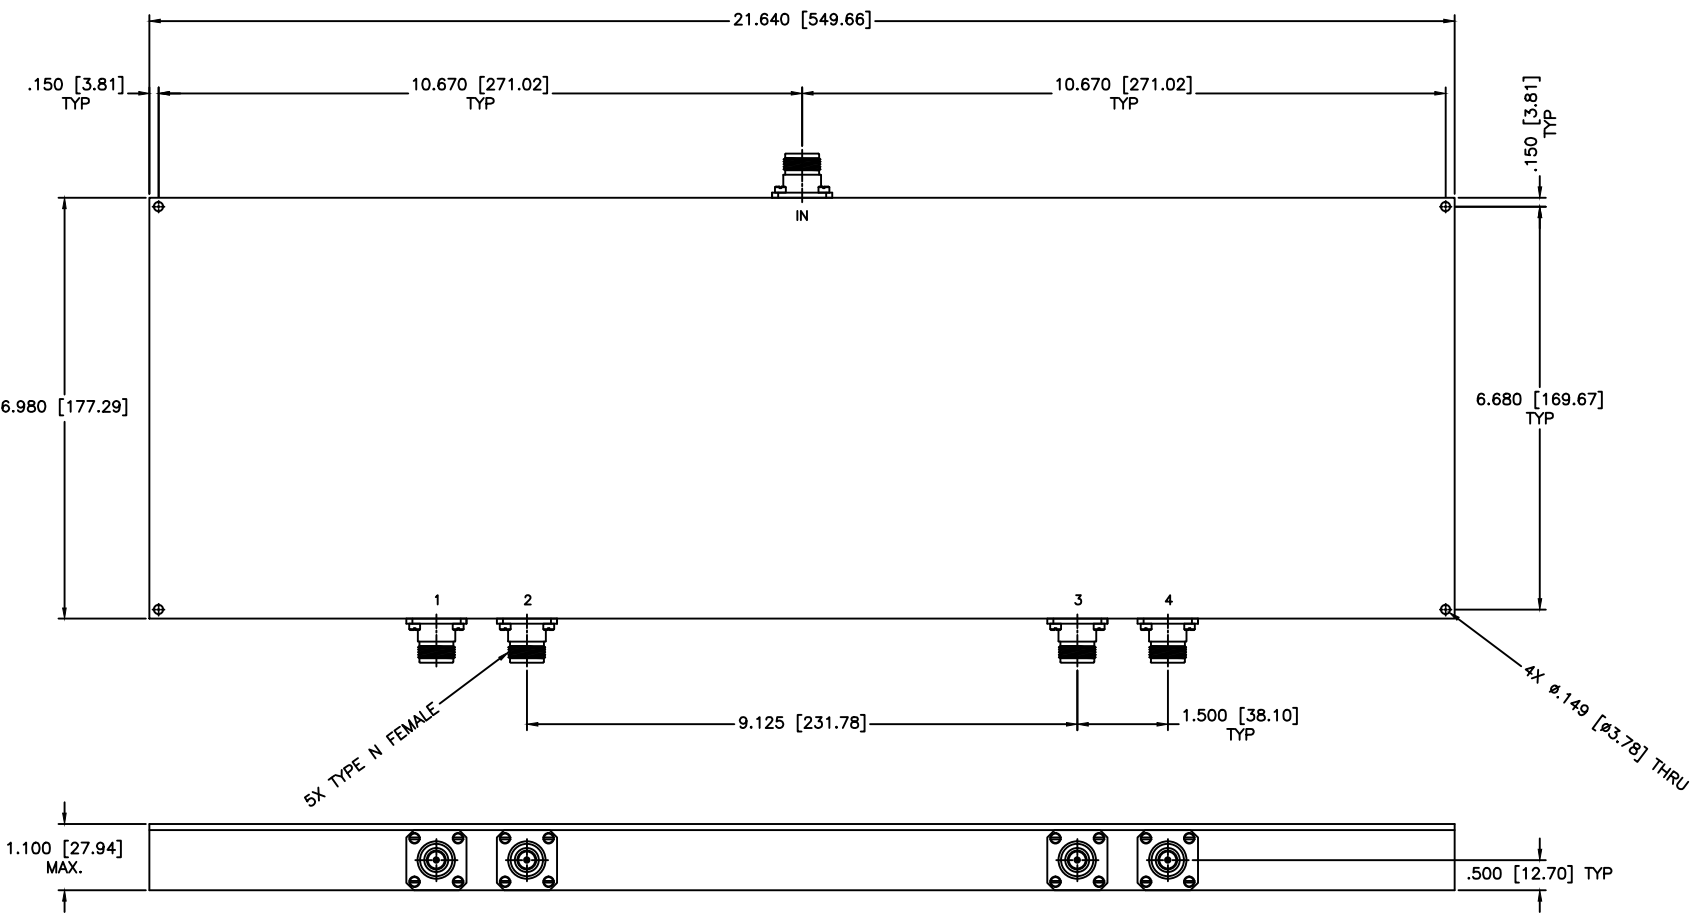

SPECIFICATIONS

Frequency Range: 50–100 MHz
 Insertion Loss: 0.6dB Max.
 Isolation: 19dB Min.
 VSWR: 1.40:1 Max.
 Power: 200 W CW
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 5 Deg. Max.

DRAWN:		DATE:		MATERIALS:		REVISED:		REV:	
Piboon Luthamthan		02-28-2011		4-WAY MICROSTRIP POWER DIVIDER/COMBINER		85569		D N/A	
APPROVED:		DATE:		DRAWING TITLE:		PART NO.:		CHG CODE:	
T. Nguyen		02-28-2011		4-WAY MICROSTRIP POWER DIVIDER/COMBINER		PM4-1-200/NF		OD2LS	
DO NOT SCALE THE DRAWING				MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. DAVENPORT, FL 33710 TEL: (727) 344-6054 FAX: (727) 361-8118 WWW.MCLI.COM					