


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

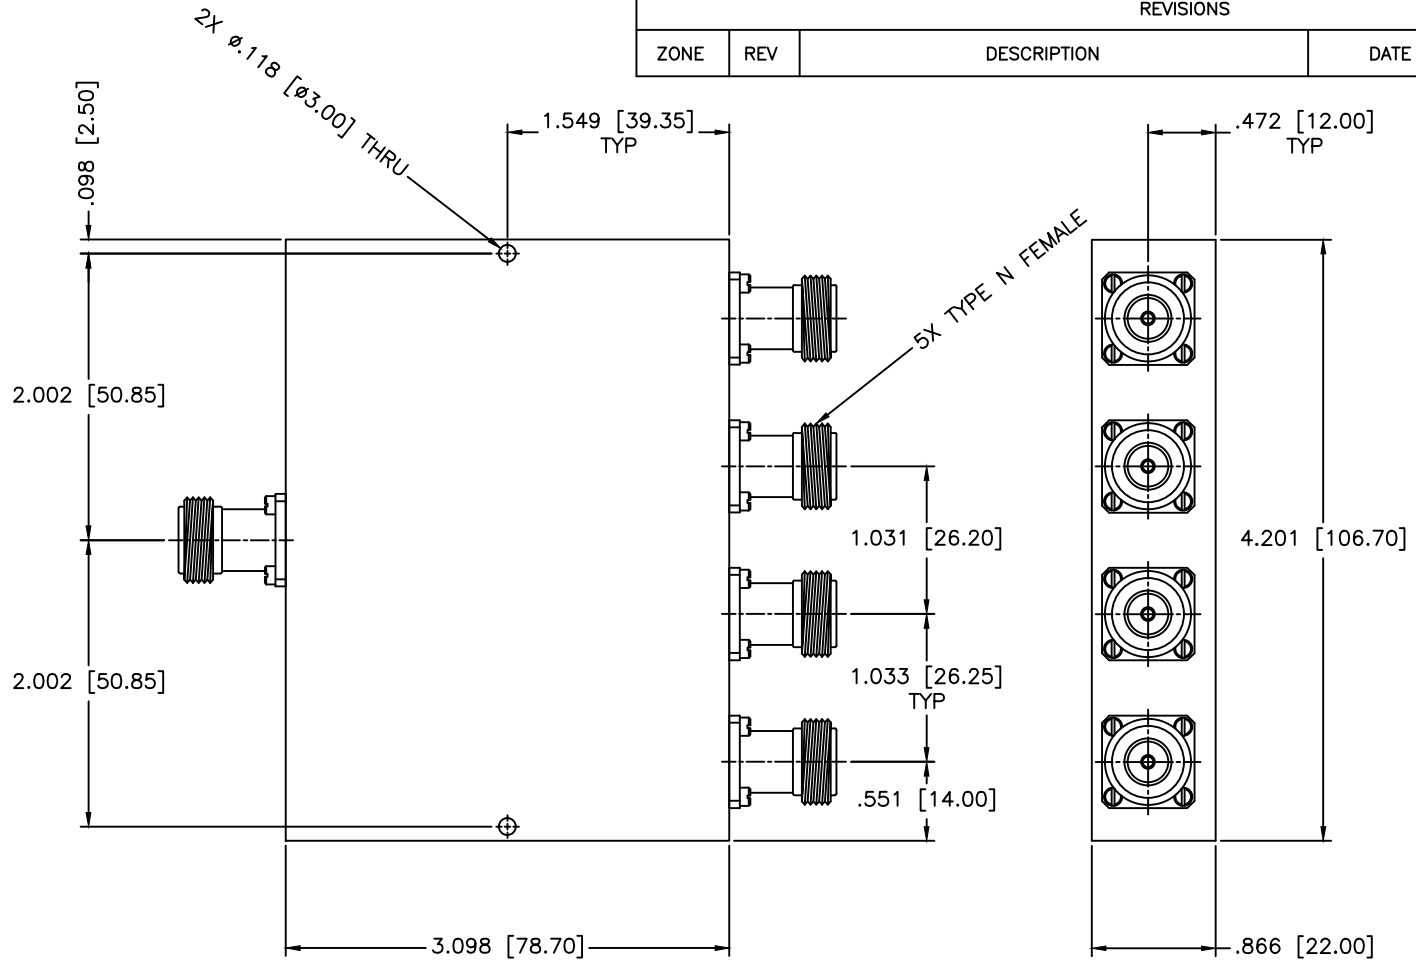

**SPECIFICATIONS**

Frequency Range: 800–2500 MHz  
 Insertion Loss: 1.2dB Max.  
 Isolation: 17dB Min.  
 Power: 50 Watts  
 VSWR: 1.40:1 Max.  
 Operating Temperature: –35°C to +55°C

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	07-19-2006
APPROVED:	DATE:
T. Nguyen	07-19-2006

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	4-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	PM4-114/NF	
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	A	N/A	82605	DO NOT SCALE THE DRAWING

