


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

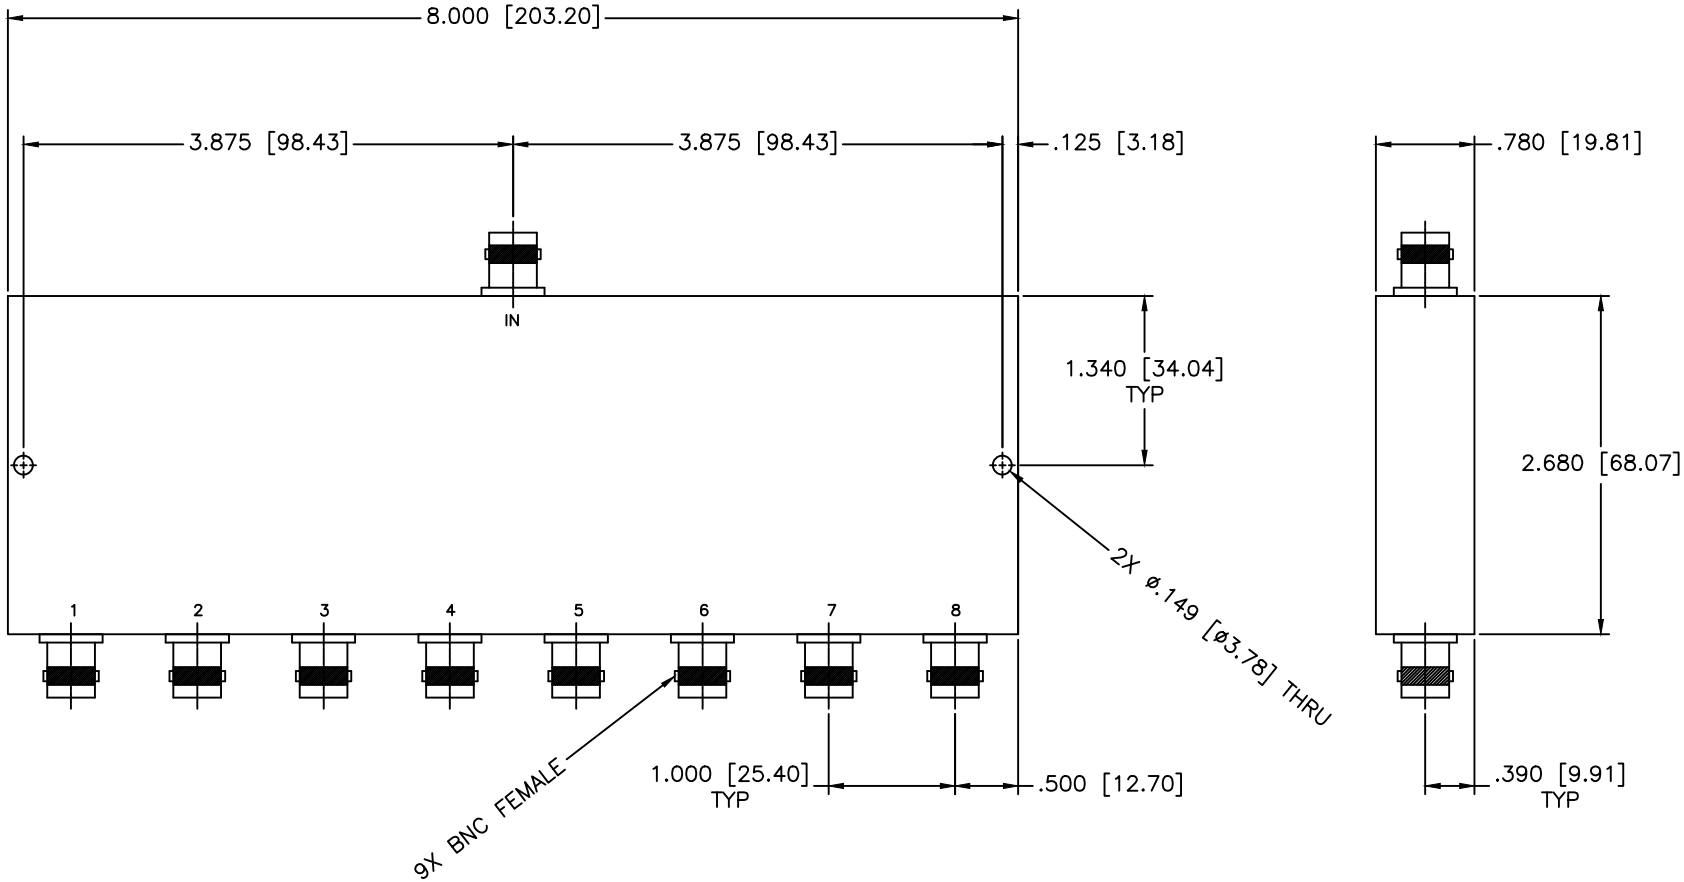

9X BNC FEMALE

2X ϕ .149 [ϕ 3.78] THRU

SPECIFICATIONS

Frequency Range: 800–2400 MHz
 Insertion Loss: 0.8dB Max.
 Isolation: 16dB Min.
 Power: 30 Watts
 Amplitude Balance: ± 0.6 dB Max.
 VSWR IN/OUT: 1.60:1/1.50:1 Max.
 Phase Balance: ± 12 Deg. Max.
 Impedance: 75 Ohms

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 8-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 04-24-2007	PART NO. PM8-15-75/BF			
APPROVED: T. Nguyen	DATE: 04-24-2007	CAGE CODE: OD2L5	SIZE: N/A REV: N/A	DWG NO. 82813	
<small>PROPRIETARY NOTICE: THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		<small>DO NOT SCALE THE DRAWING</small>			