


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

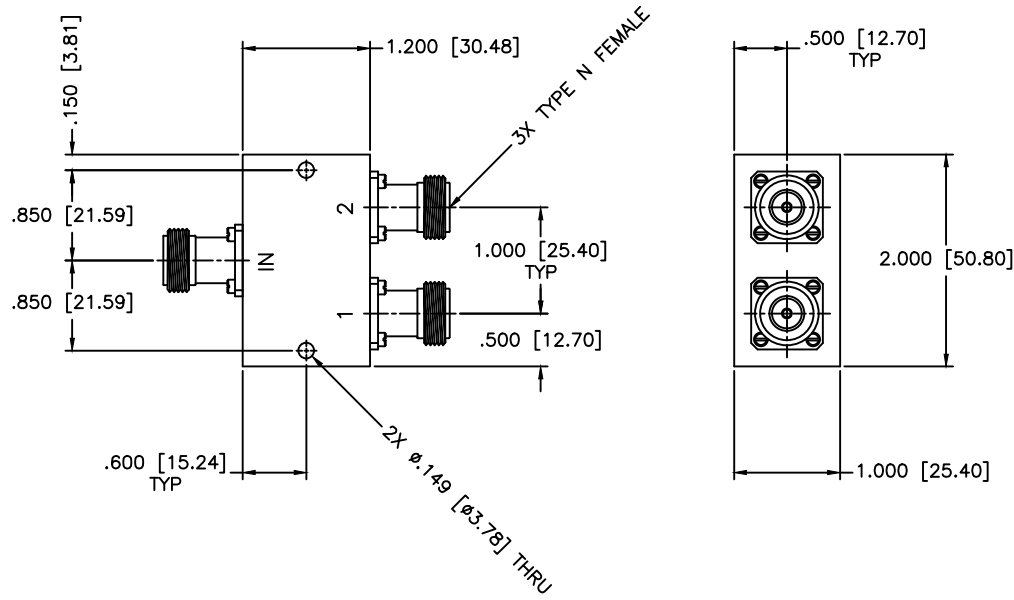

SPECIFICATIONS

Frequency Range: 0.88–0.96 GHz
 Insertion Loss: 0.5dB Max.
 Isolation: 20dB Min.
 VSWR In/Out: 1.35:1/1.30:1 Max.
 Phase Balance: ±7 Deg. Max.
 Amplitude Balance: 0.4dB Max.
 Power: 30W (Load vswr@1.2)
 Storage Temperature: –65°C to +125°C
 Operating Temperature: –55°C to +95°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS2-98/NF	
DRAWN: Paiboon Luekhamhan	DATE: 12-22-1997	CAGE CODE: OD2L5	SIZE: C
APPROVED: T. Nguyen	DATE: 12-22-1997	REV: N/A	DWG NO.: 80817
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	