


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

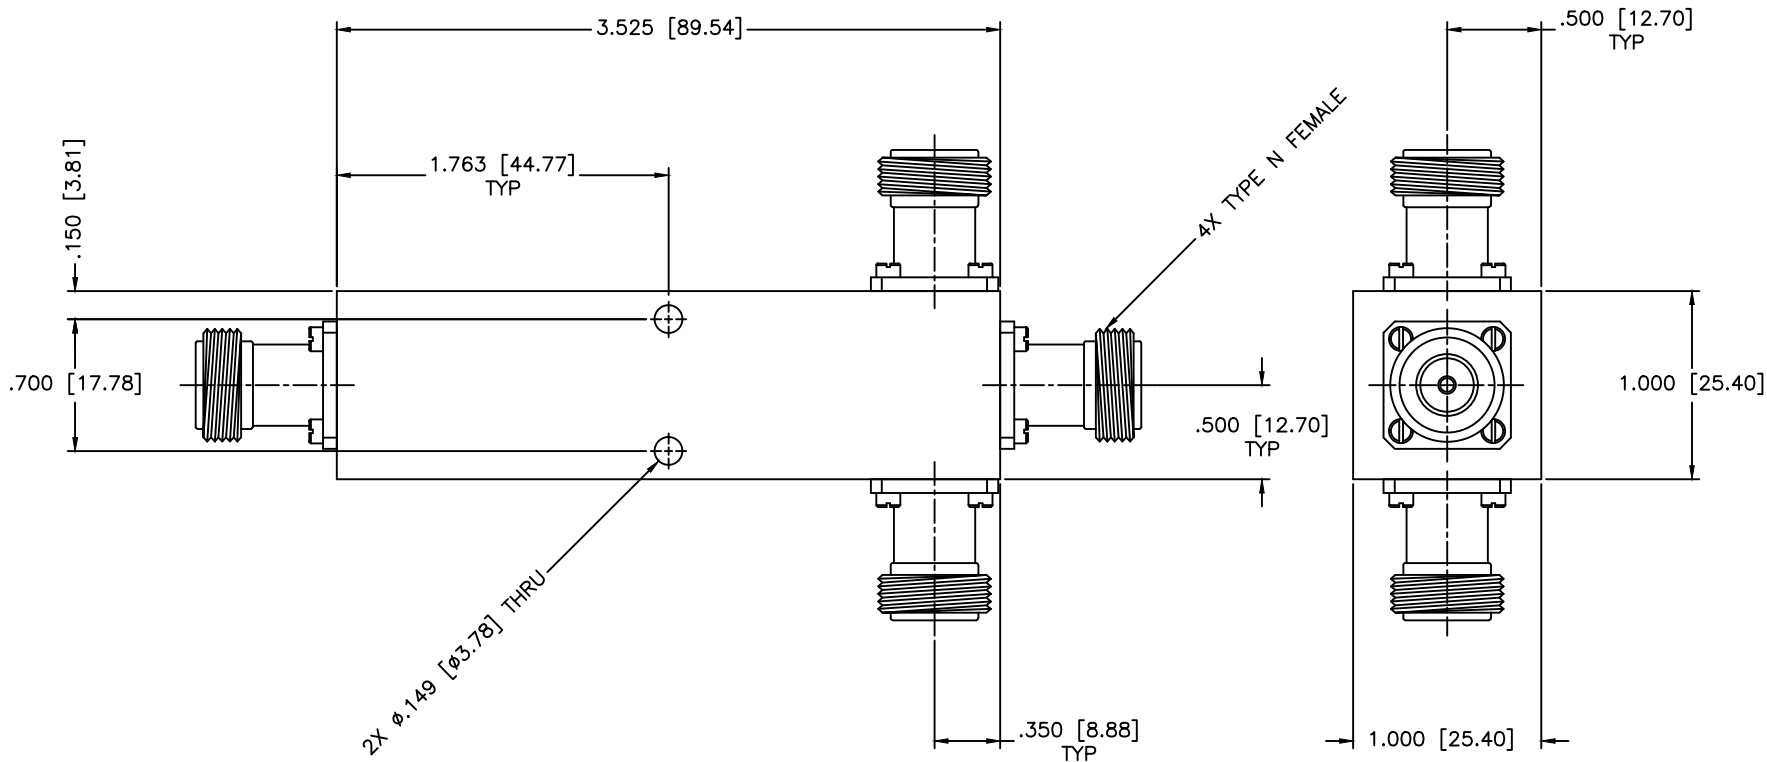

SPECIFICATIONS

Frequency Range: 2–14 GHz
 Insertion Loss: 1.8dB Max.
 Isolation: 16dB Min.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±12 Deg. Max.
 VSWR Input/Output: 2.00:1/1.80:1 Max.
 Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 3-WAY POWER DIVIDER		
DRAWN: Paiboon Luexhamhan		PART NO. PS3-6/NF		
DATE: 01-12-2012	DATE: 01-12-2012	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen		DWG NO. 86075		
<small>FREQUENCY NOTES: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		DO NOT SCALE THE DRAWING		