


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

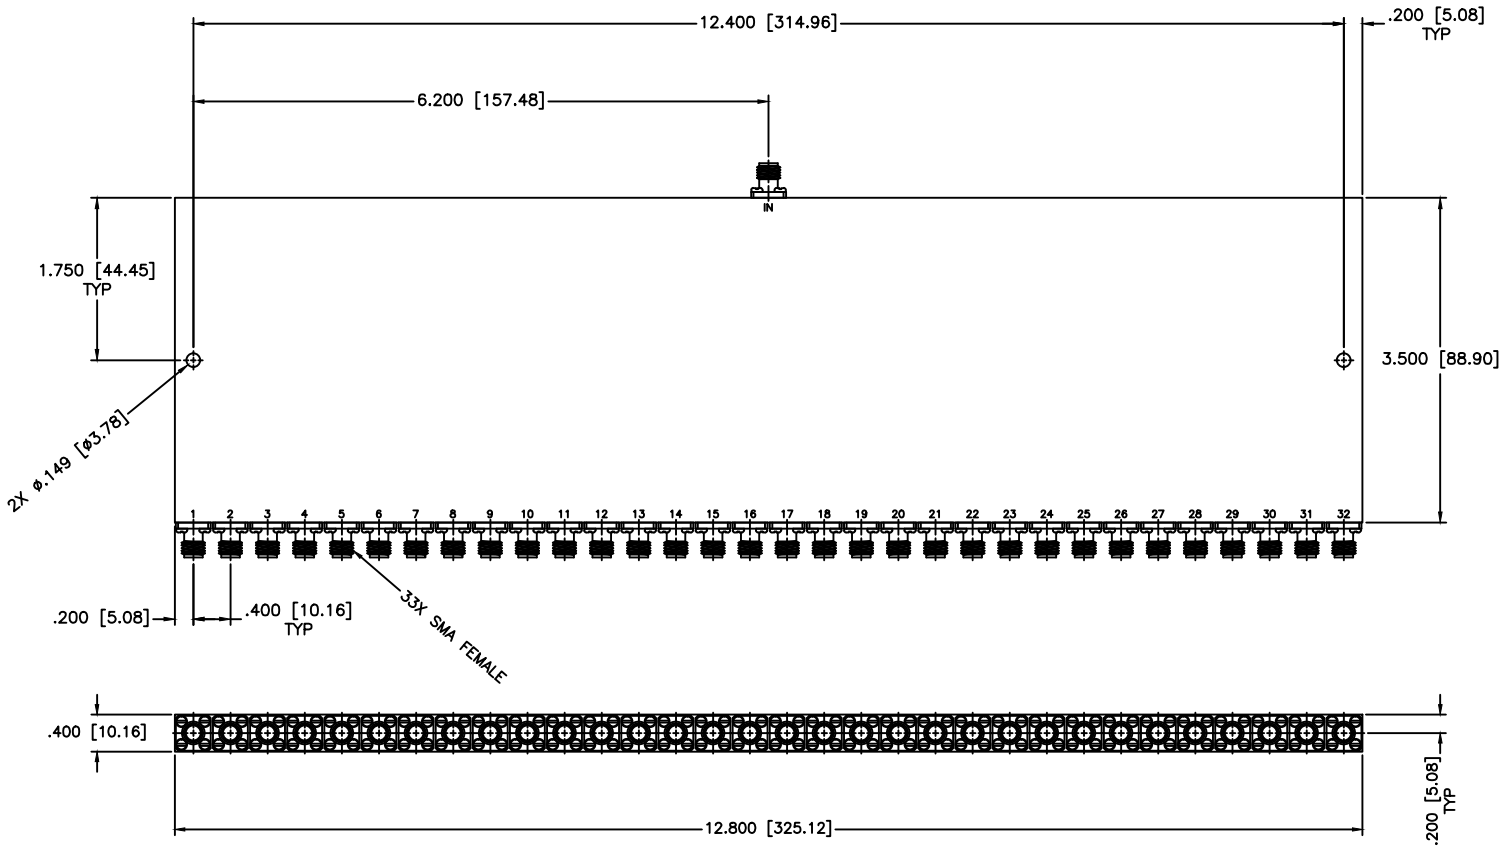

SPECIFICATIONS


- Frequency Range: 3.7–4.2 GHz
- Insertion Loss: 3.9dB Max.
- Isolation: 19dB Min.
- Power Handling: 30 Watts Max.
- VSWR: 1.60:1 Max.
- Amplitude Balance: ±0.8dB Max.
- Phase Balance: ±6° Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-04-1999
APPROVED: T. Nguyen	DATE: 10-04-1999

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



SCALE: N/A	
SHEET: N/A	
DRAWING TITLE: 32-WAY POWER DIVIDER	
PART NO.: PS32-19	
CAGE CODE: OD2L5	SIZE: C
REV: N/A	DWG NO.: 80334
DO NOT SCALE THE DRAWING	