


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

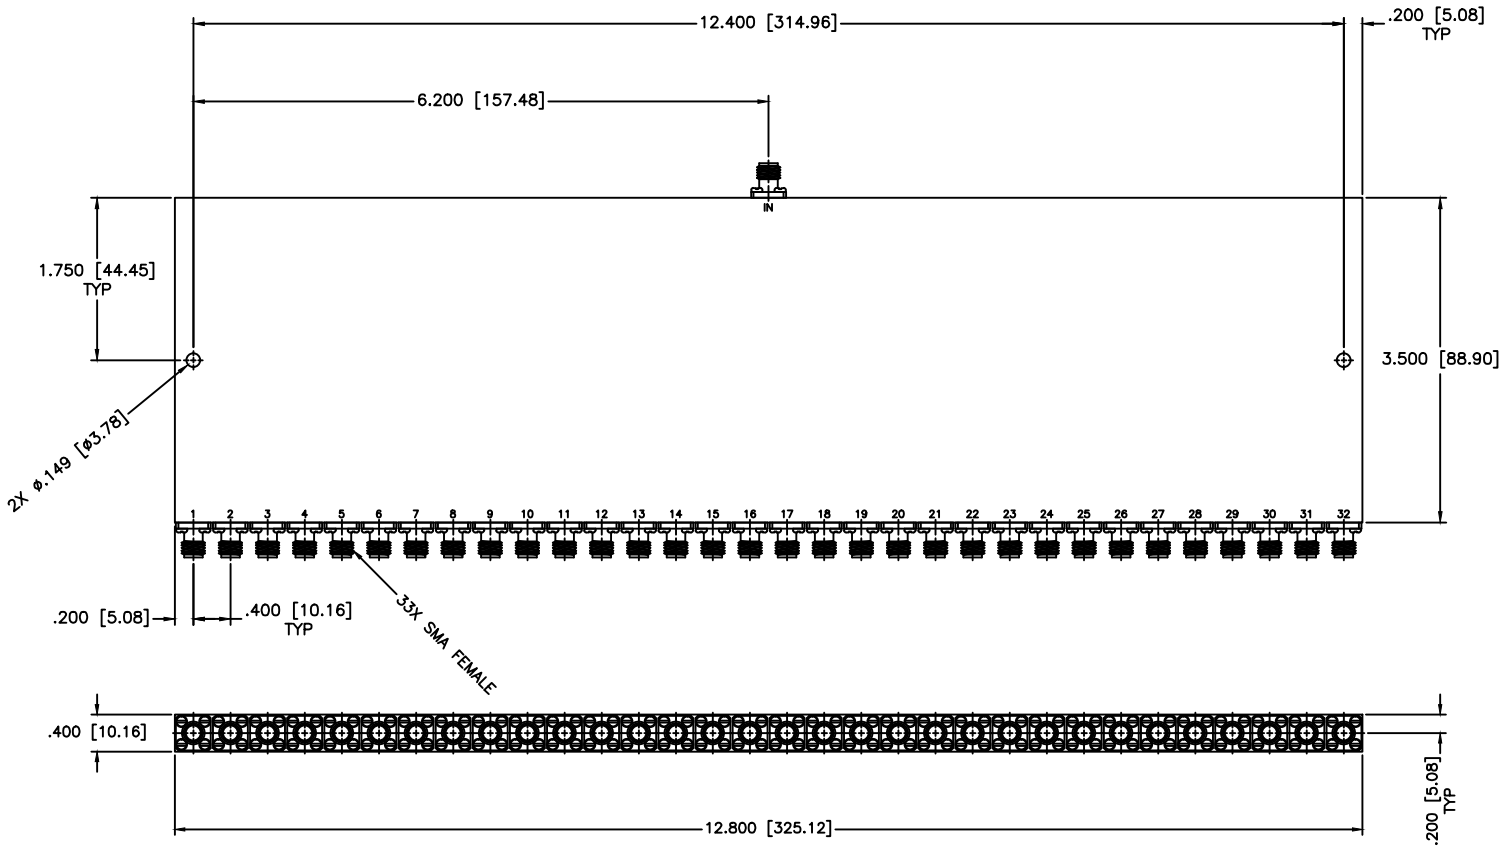

**SPECIFICATIONS**

- Frequency Range: 5.8–6.4 GHz
- Insertion Loss: 4.5dB Max.
- Isolation: 19dB Min.
- Power Handling: 20 Watts Max.
- VSWR: 1.60:1 Max.
- Amplitude Balance:  $\pm 1.0$ dB Max.
- Phase Balance:  $\pm 7^\circ$  Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE:		32-WAY POWER DIVIDER	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:		PS32-20		
DRAWN:	DATE:		CAGE CODE:	SIZE:	REV:	DWG. NO.:
Paiboon Luekhamhan	10-04-1999		OD2L5	C	N/A	82735
APPROVED:	DATE:	DO NOT SCALE THE DRAWING				
T. Nguyen	10-04-1999					