


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

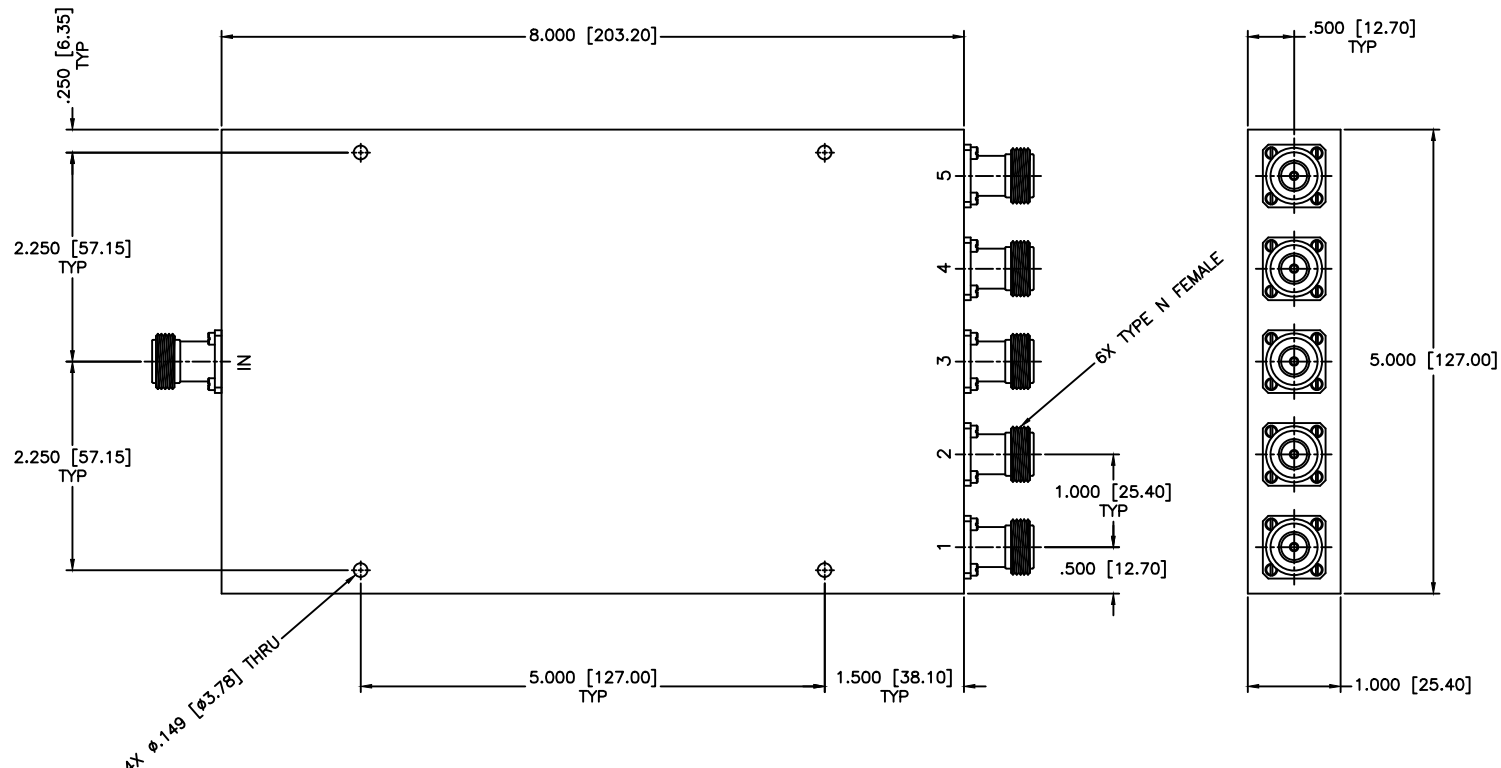

SPECIFICATIONS

Frequency Range: 0.5–8 GHz
 Insertion Loss: 2.9dB Min.
 Isolation: 14dB Min.
 VSWR Input/Output: 1.90:1 Max.
 Amplitude Balance: ±1.5dB Max.
 Input Power: 30 Watts (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 5-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paiboon Luethamhan		DATE: 04-19-2012		PART NO.: PS5-22/NF	
APPROVED: T. Nguyen		DATE: 04-19-2012		CAGE CODE: OD2L5	SIZE: C REV: N/A DWG NO.: 86081
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				DO NOT SCALE THE DRAWING	