


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

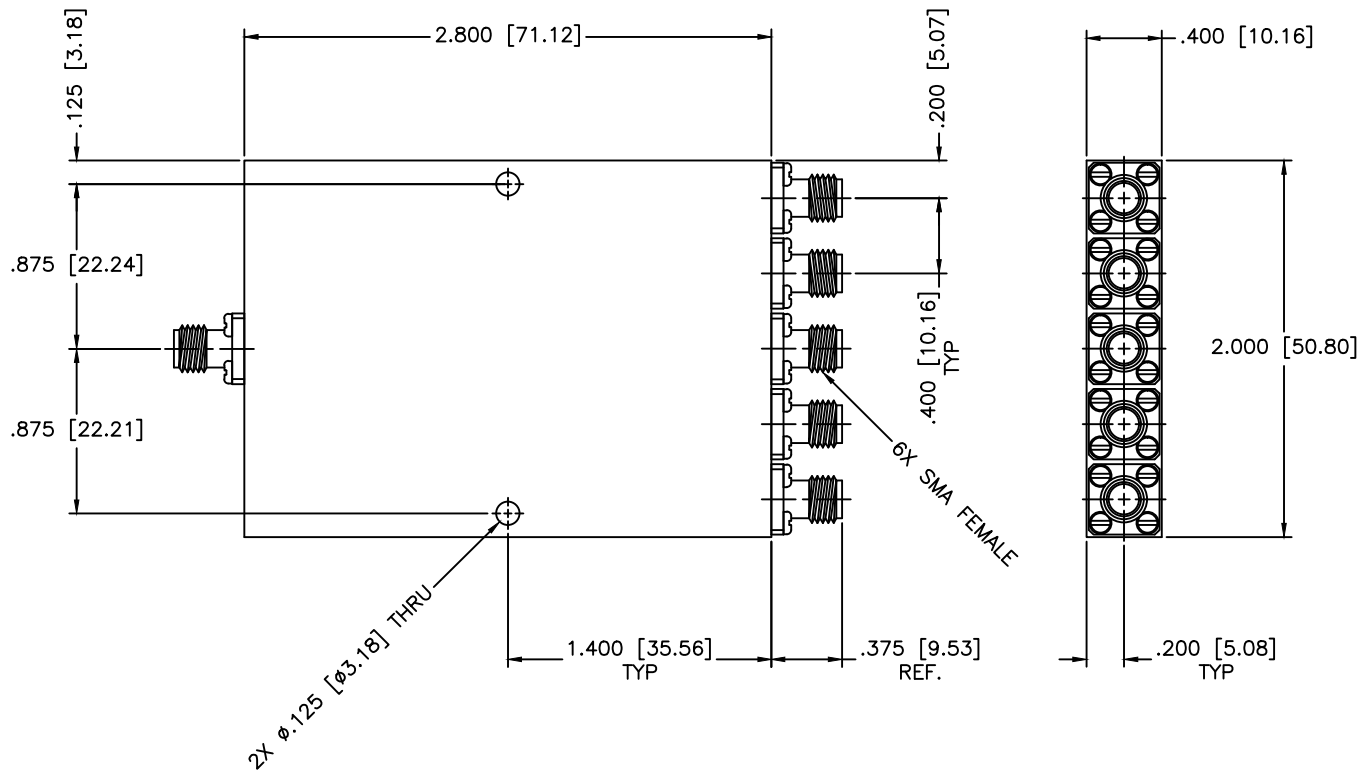

SPECIFICATIONS

Frequency Range: 3.625–6.4 GHz
 Insertion Loss: 2.0dB Max.
 Isolation: 14dB Min.
 VSWR: 1.90:1 Max.
 Amplitude Balance: ±1.5dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 12-23-2013
APPROVED: T. Nguyen	DATE: 12-23-2013

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
	SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .008 ANGLE: ± 1/2°	DRAWING TITLE: 5-WAY POWER DIVIDER	
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS5-24	
THIRD ANGLE PROJECTION	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG. NO. 86818
	DO NOT SCALE THE DRAWING	