


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

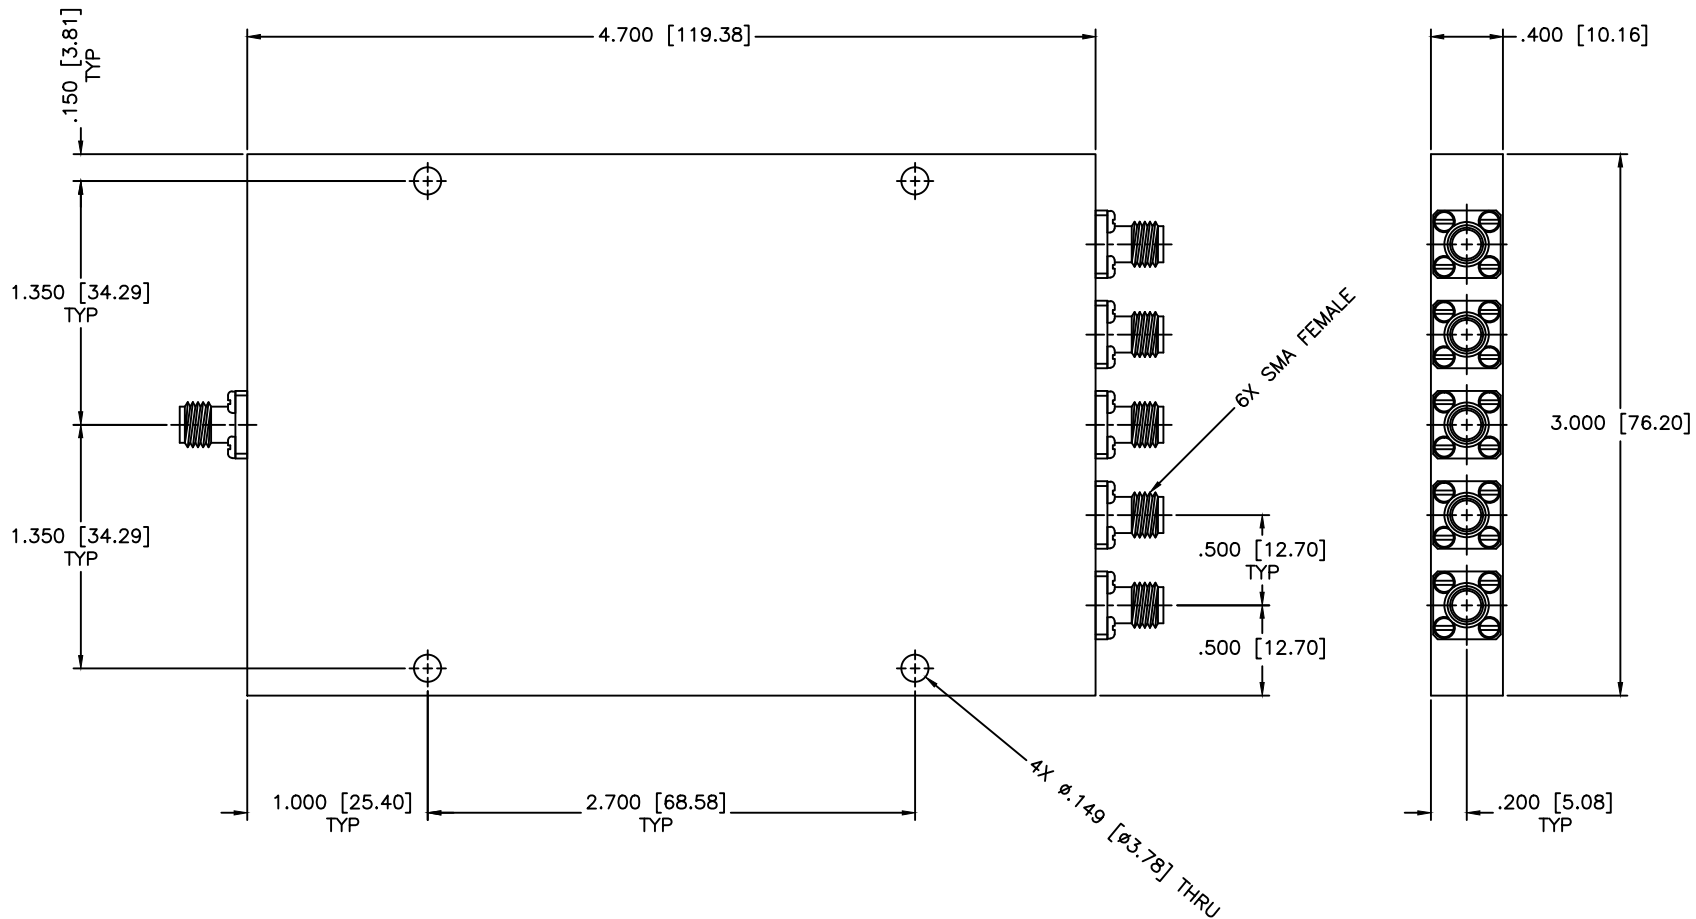

SPECIFICATIONS

Frequency Range: 0.5–2 GHz
 Insertion Loss: 1.9dB Max.
 Isolation: 14dB Min.
 VSWR Input/Output: 1.70:1 Max.
 Amplitude Balance: ±1.2dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 5-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS5-3		
DATE: 03-21-1998		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 03-21-1998		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A REV: N/A DWG NO. 81009 DO NOT SCALE THE DRAWING		