


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

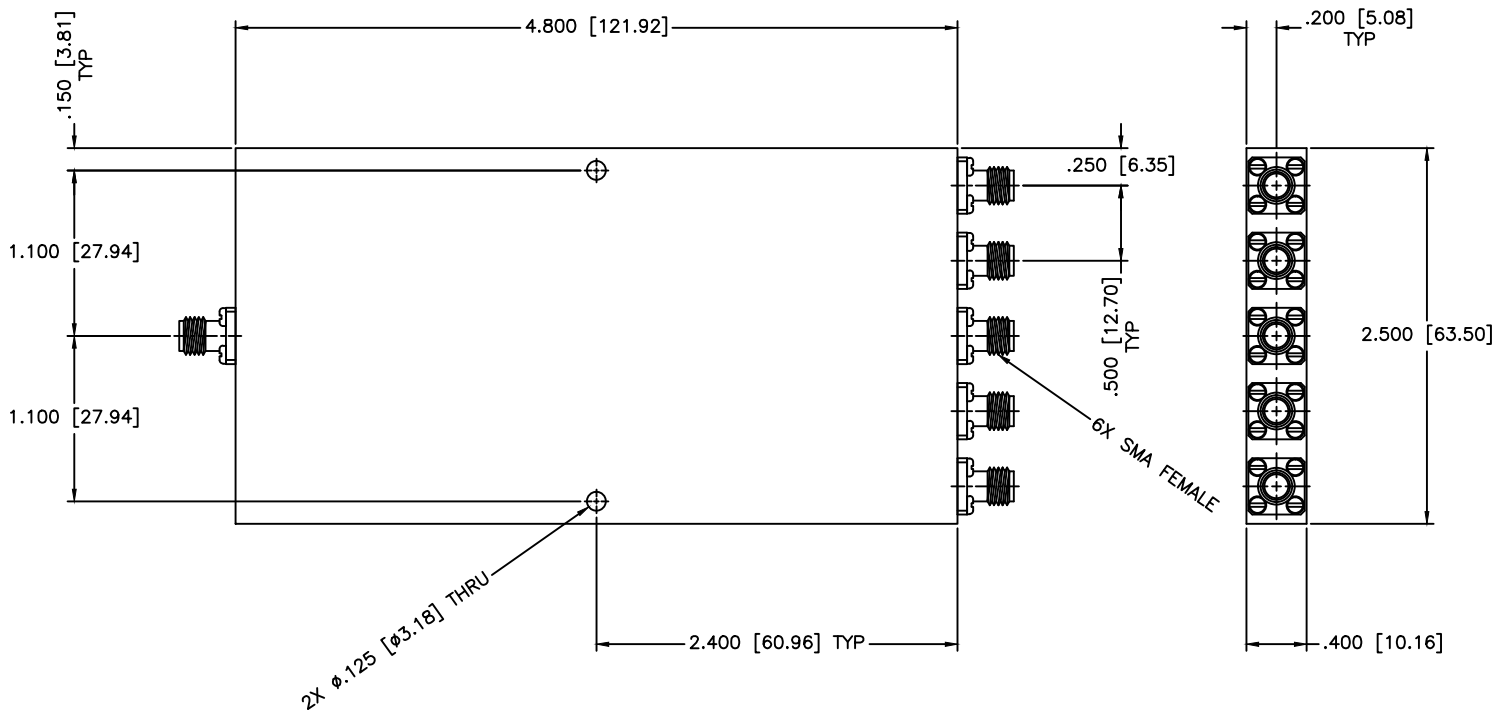

SPECIFICATIONS

Frequency Range: 2–6 GHz
 Insertion Loss: 2.4dB Max.
 Isolation: 15dB Min.
 VSWR: 2.0:1 Max.
 Amplitude Balance: ±1.4dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	5-WAY POWER DIVIDER
DRAWING:		Paiboon Luethamhan	DATE:	03-21-1998
APPROVED:		T. Nguyen	DATE:	03-21-1998
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:	PS5-39	
 THIRD ANGLE PROJECTION		CAGE CODE:	SIZE:	REV:
		OD2L5	C	N/A
		DO NOT SCALE THE DRAWING		DWG NO.:
				81016