


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

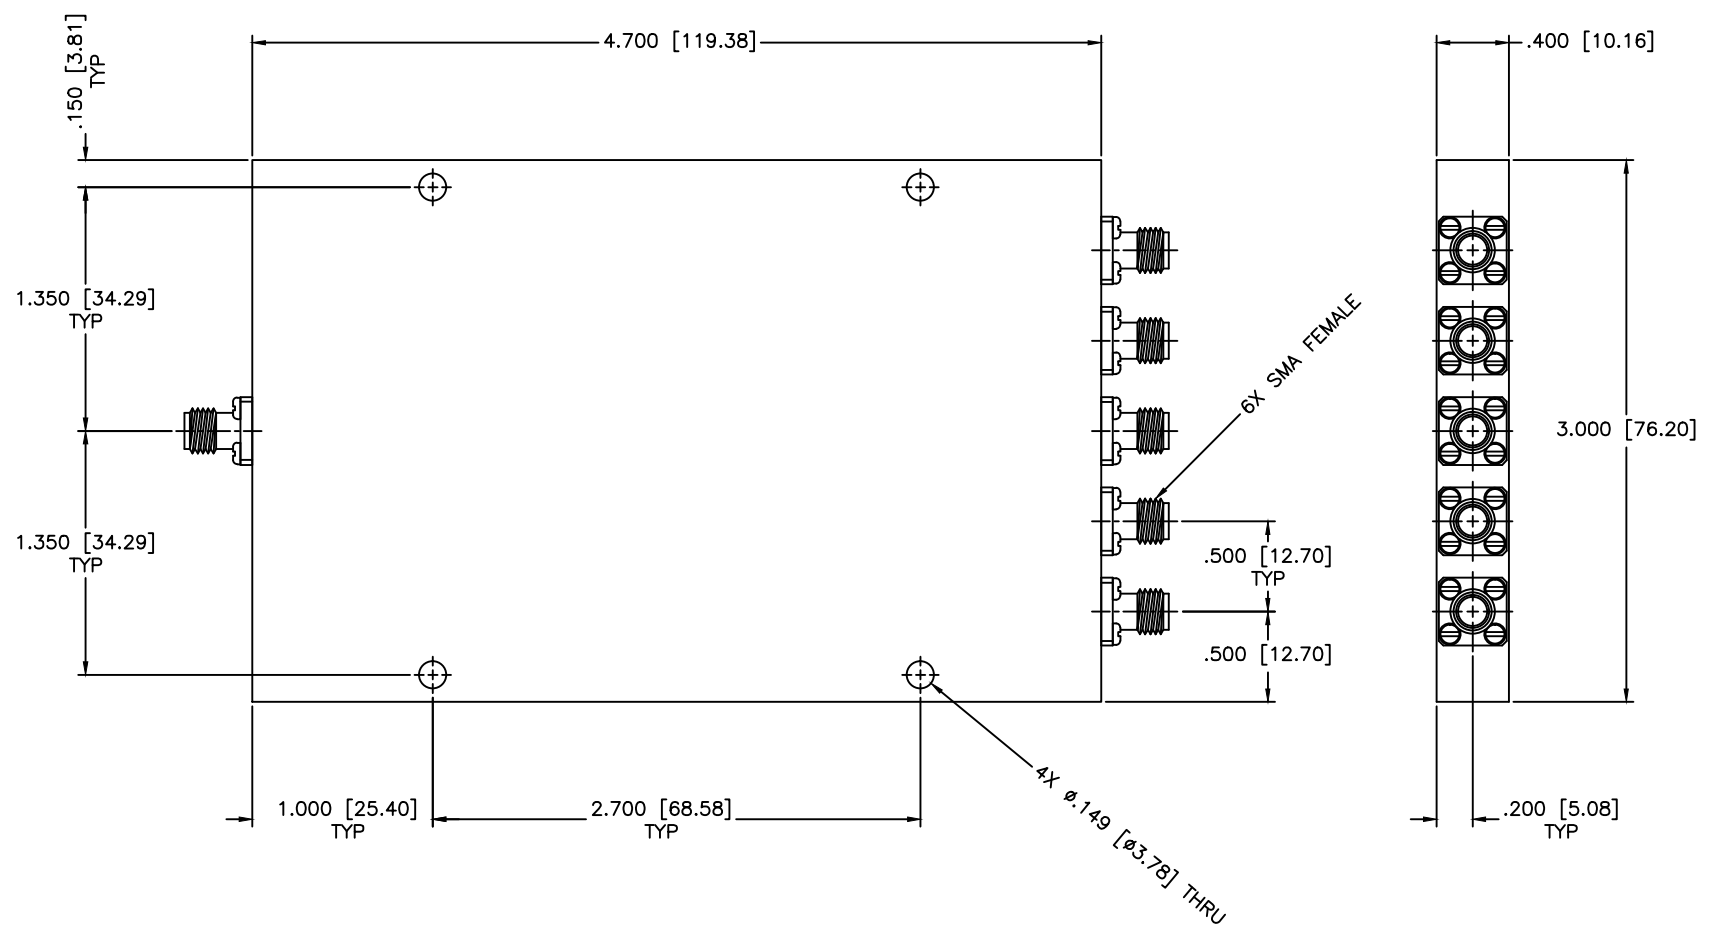

SPECIFICATIONS

Frequency Range: 0.5–2.5 GHz
 Insertion Loss: 2.6dB Max.
 Isolation: 12dB Min.
 VSWR Input/Output: 1.75:1 Max.
 Amplitude Balance: ±1.2dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com	SCALE: N/A
			SHEET: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 5-WAY POWER DIVIDER
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PS5-4
DRAWN: Paiboon Luekhamhan	DATE: 03-21-1998	THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5
APPROVED: T. Nguyen	DATE: 03-21-1998	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING	
		DWG NO.: 82056	