


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

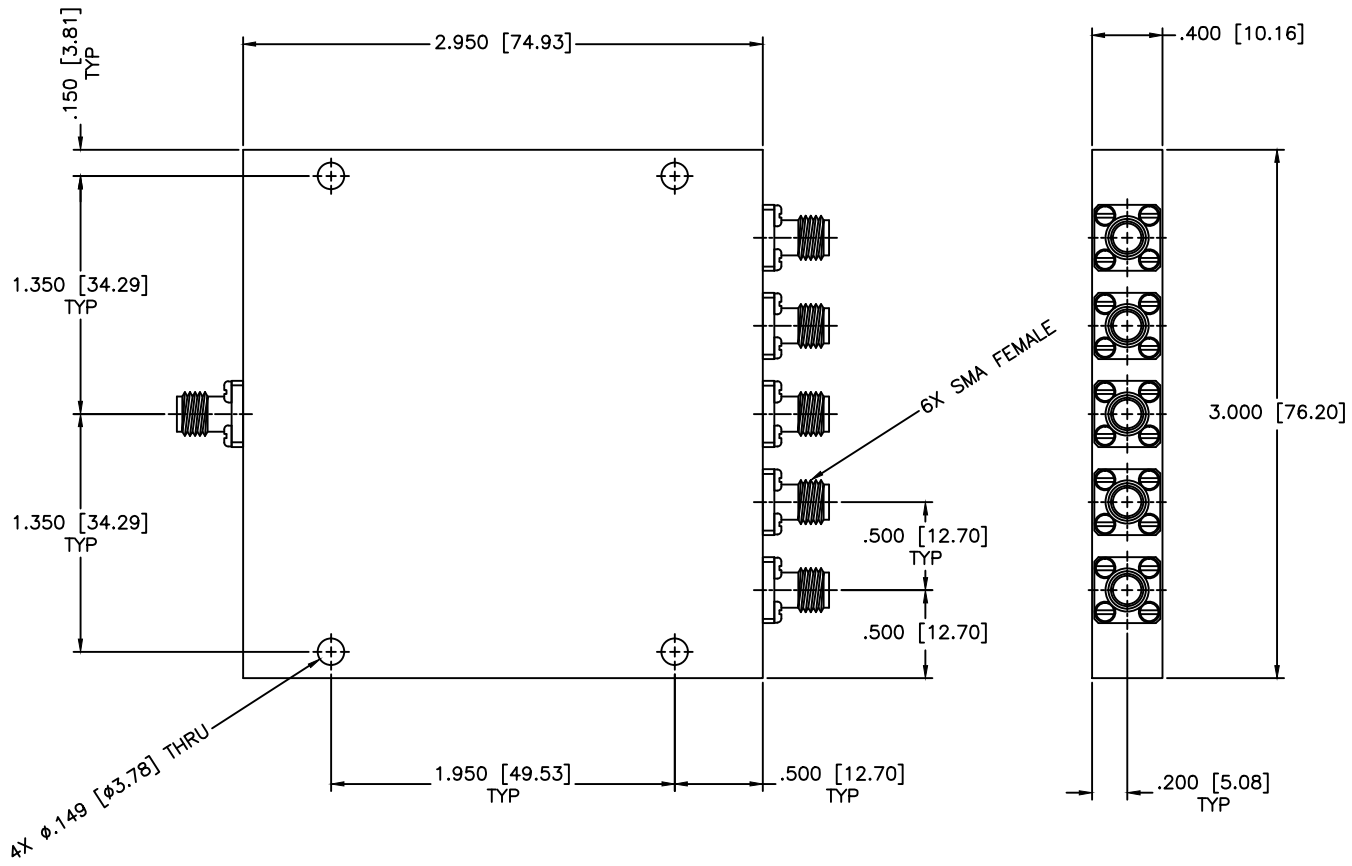

4X ϕ .149 [3.78] THRU

SPECIFICATIONS

Frequency Range: 4-8 GHz
 Insertion Loss: 2.6dB Max.
 Isolation: 13dB Min.
 VSWR Input/Output: 1.75:1 Max.
 Amplitude Balance: \pm 2dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-21-1998
APPROVED: T. Nguyen	DATE: 03-21-1998

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm .01 \pm .005 ANGLE: \pm 1/2°	DRAWING TITLE: 5-WAY POWER DIVIDER	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS5-6	
THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5	SIZE: A REV: A DWG NO. 81011
	DO NOT SCALE THE DRAWING	