


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

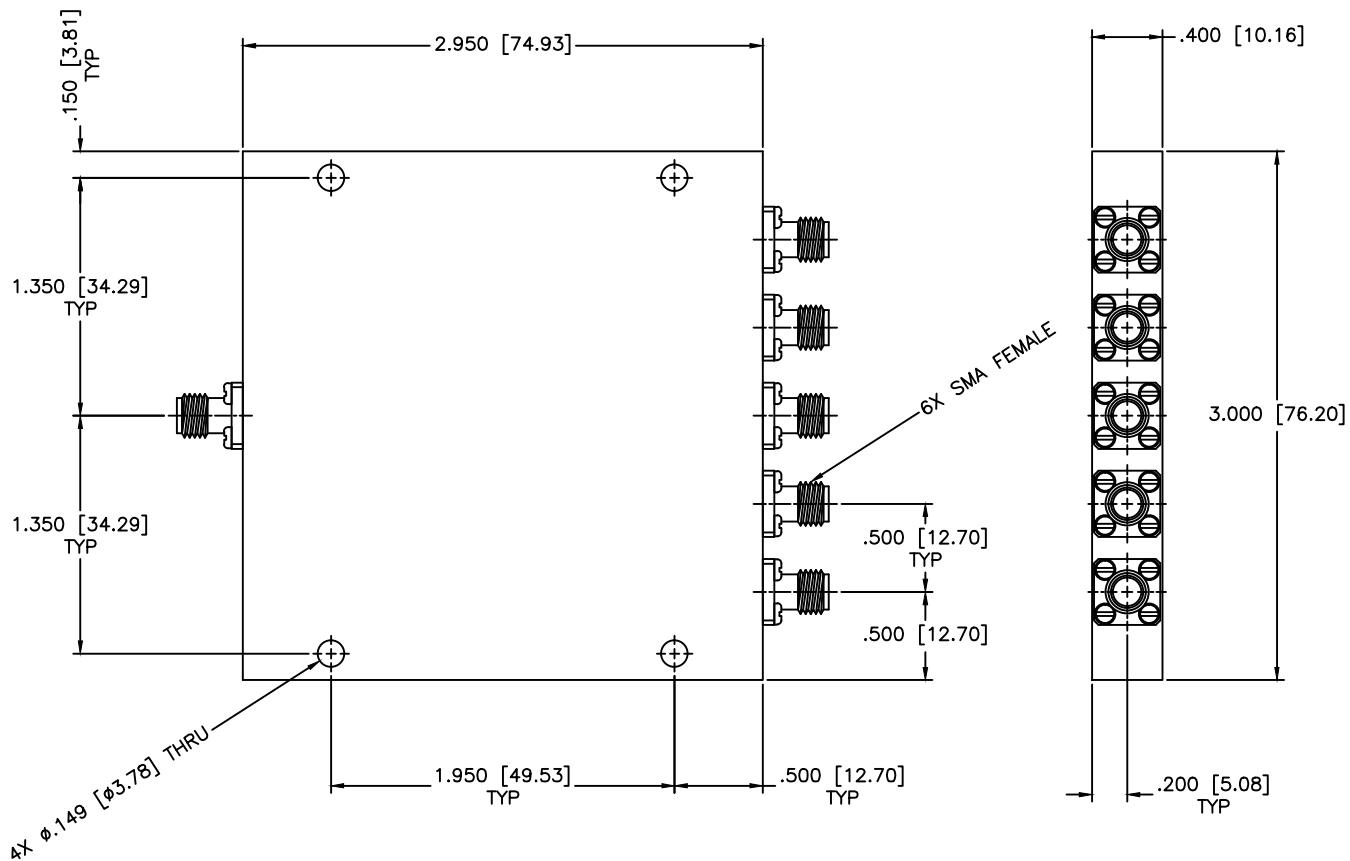

4X  $\phi$ .149 [3.78] THRU

**SPECIFICATIONS**

- Frequency Range: 2-8 GHz
- Insertion Loss: 2.7dB Max.
- Isolation: 11dB Min.
- VSWR Input/Output: 1.80:1 Max.
- Amplitude Balance:  $\pm 1.5$ dB Max.
- Input Power: 10W (Load vswr @ 1.2)

MATERIAL:	
DRAWN:	DATE:
Pai boon Luexhamhan	03-21-1998
APPROVED:	DATE:
T. Nguyen	03-21-1998



MICROWAVE COMMUNICATIONS LABORATORIES INC.  
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
TEL: (727) 344-6254 FAX: (727) 381-6116  
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:  
TOLERANCES  
IN (INCHES) OR [mm] (MILLIMETERS)  
FRACTIONS:  $\pm 1/64$   
DECIMALS:  $\pm .01 \pm .005$   
ANGLE:  $\pm 1/2^\circ$

DRAWING TITLE:			
5-WAY POWER DIVIDER			
PART NO.			
PS5-7			
CAGE CODE:	SIZE:	REV:	DWG. NO.
OD2L5	N/A	N/A	81012
DO NOT SCALE THE DRAWING			

THIRD ANGLE PROJECTION