




REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

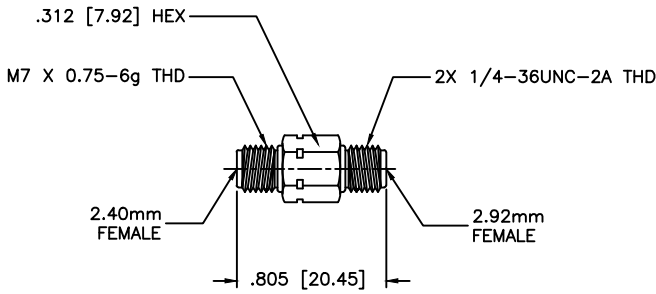


ADE-40-FF

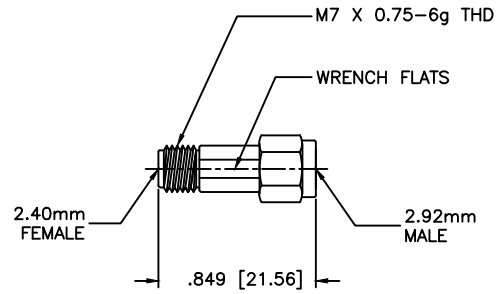

ADE-40-FM

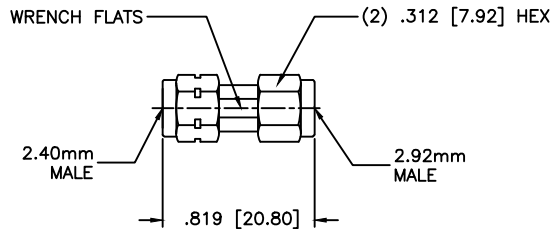

ADE-40-MM

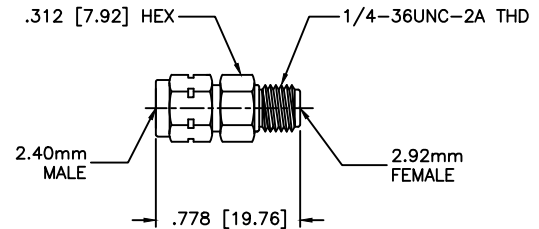

ADE-40-MF

General Specifications

Impedance: 50 Ohms

VSWR: 1.10:1 Max. @ DC-18GHz

VSWR: 1.15:1 Max. @ 18-40GHz

Frequency: DC-40 GHz

Connectors: Passivated Stainless Steel

Contacts: Beryllium Copper Gold Plated

Insulator: Teflon

Temperature Rating: -55°C to +135°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	2.40mm to 2.92mm ADAPTERS
DRAWN:		DATE:		PART NO.		DWG NO.
Paiboon Luexhamhan		08-29-2011		ADE-40		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		08-29-2011		OD2L5	A	N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		85875

