REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

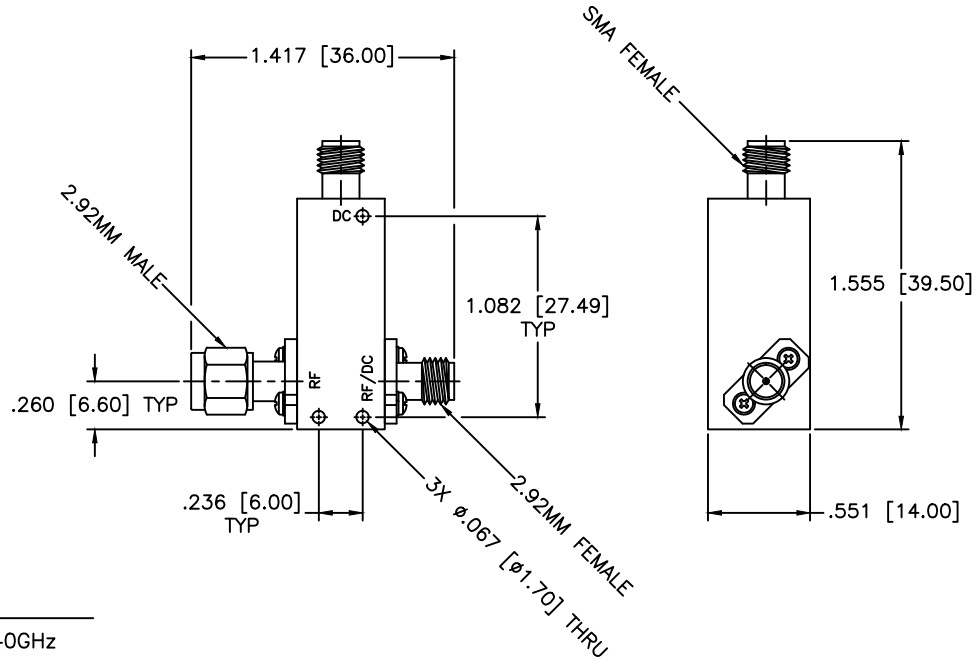

SPECIFICATIONS

Frequency Range:	30KHz–40GHz
Average Power:	2W
Insertion loss:	1.5dB Typ.
	3.5dB Max.
VSWR:	1.60:1 Typ.
	2.50:1 Max.
Voltage:	25V Max.
DC Current:	0.75A Max.
Operating Temperature:	–40°C to +70°C

MATERIAL:

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344–6254 FAX: (727) 381–6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.020 HOLE: ±.008
ANGLE: ±1/2°

DRAWING TITLE: BIAS TEE

PART NO. BT–00003X40–292S

DRAWN:	DATE:
Paiboon	03–12–2025
APPROVED: P. Nguyen	DATE: 03–12–2025

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE:	SIZE:	REV:	DWG NO.
0D2L5	N/A	A	87339
	DO NOT SCALE THE DRAWING		