
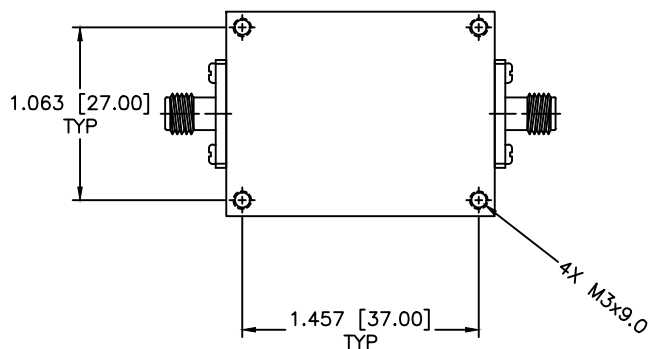


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 1–30 MHz
Insertion loss: 1.0dB Max.
VSWR: 1.25:1 Max.
Voltage: 12V
DC Current: 0.5A Max.
Operating Temperature: –40°C to +55°C

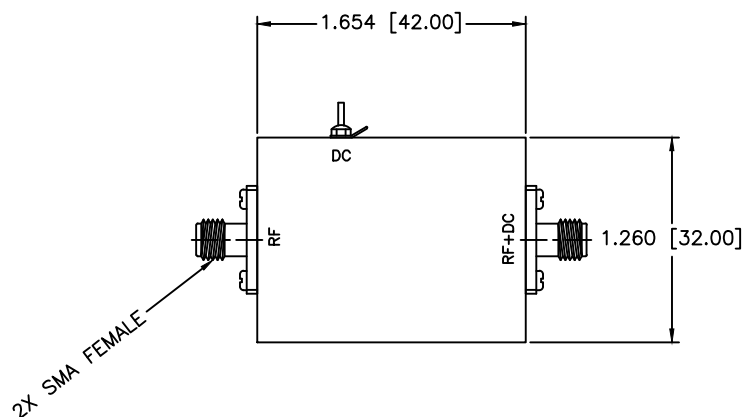

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon APPROVED: P. Nguyen		DATE: 03-11-2025 DATE: 03-11-2025		DRAWING TITLE: BIAS TEE	
				PART NO. BT-001X03-SP	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: N/A
				REV: N/A	DWG NO. 87335
DO NOT SCALE THE DRAWING					