


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

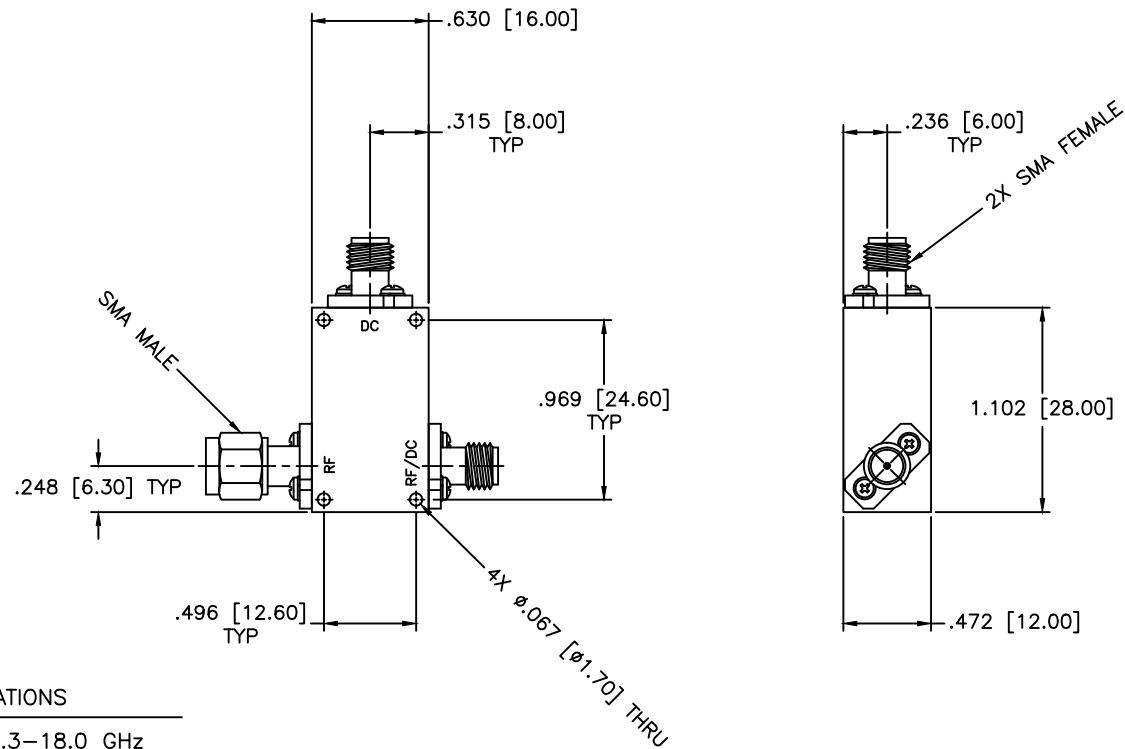

SPECIFICATIONS

Frequency Range: 0.3–18.0 GHz
 Average Power: 1W
 Insertion loss: 1.3dB Typ.
 1.5dB Max.
 VSWR: 1.40:1 Typ.
 1.60:1 Max.
 Voltage: 50V Max.
 DC Current: 0.5A Max.
 Operating Temperature: –40°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A			
				SHEET: N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.020 HOLE: ±.008 ANGLE: ±1/2°		DRAWING TITLE: BIAS TEE			
				PART NO. BT-0D3X18-S			
DRAWN: Paiboon	DATE: 03-12-2025	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: N/A	REV: A	DWG NO. 87337
APPROVED: P. Nguyen	DATE: 03-12-2025			DO NOT SCALE THE DRAWING			