
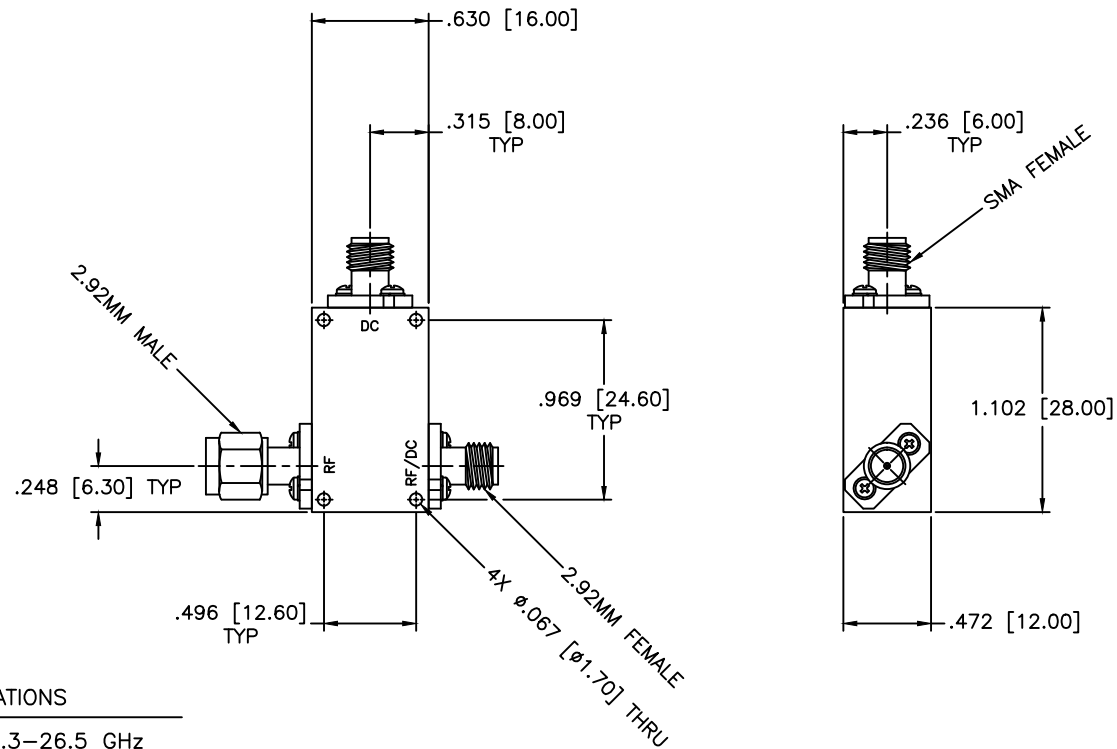


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 0.3–26.5 GHz
 Average Power: 1W
 Insertion loss: 1.5dB Typ.
 1.8dB Max.
 VSWR: 1.50:1 Typ.
 1.80:1 Max.
 Voltage: 50V Max.
 DC Current: 0.5A Max.
 Operating Temperature: –40°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A			
				SHEET:		N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.020 HOLE: ±.008 ANGLE: ±1/2°		DRAWING TITLE:					
				BIAS TEE					
		DRAWN: Paiboon DATE: 03-11-2025		PART NO.		BT-0D3X265-292S			
APPROVED: P. Nguyen DATE: 03-11-2025		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE:	REV:	DWG NO.	
		THIRD ANGLE PROJECTION 		OD2L5		N/A		A	87336
						DO NOT SCALE THE DRAWING			