


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

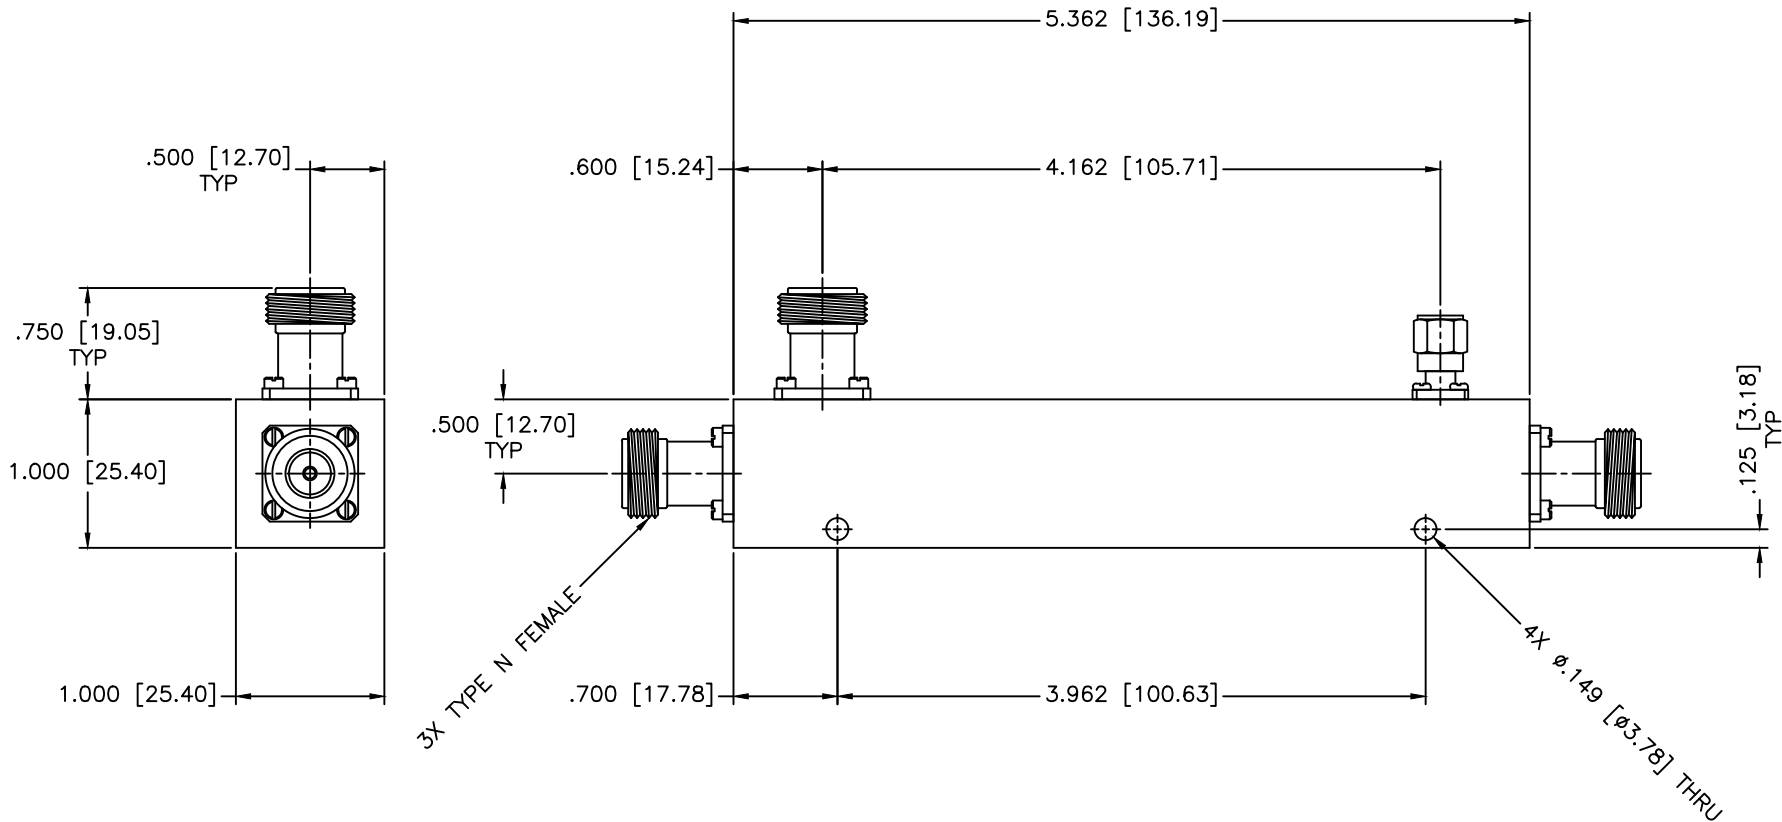

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 VSWR: 1.20:1 Max.
 Coupling: 6±1.0dB
 Insertion Loss: 0.9dB Max.
 Directivity: 23dB Min.
 Frequency Sensitivity: ±0.75dB

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.008 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	
DRAWN:		PART NO.		DIRECTIONAL COUPLER		
DATE:		CAGE CODE:		CB1-6/NF		
APPROVED:		SIZE:		REV:		DWG NO.
T. Nguyen		OD2L5		N/A		80495
DATE:		DO NOT SCALE THE DRAWING		THIRD ANGLE PROJECTION		
11-14-1997						