


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

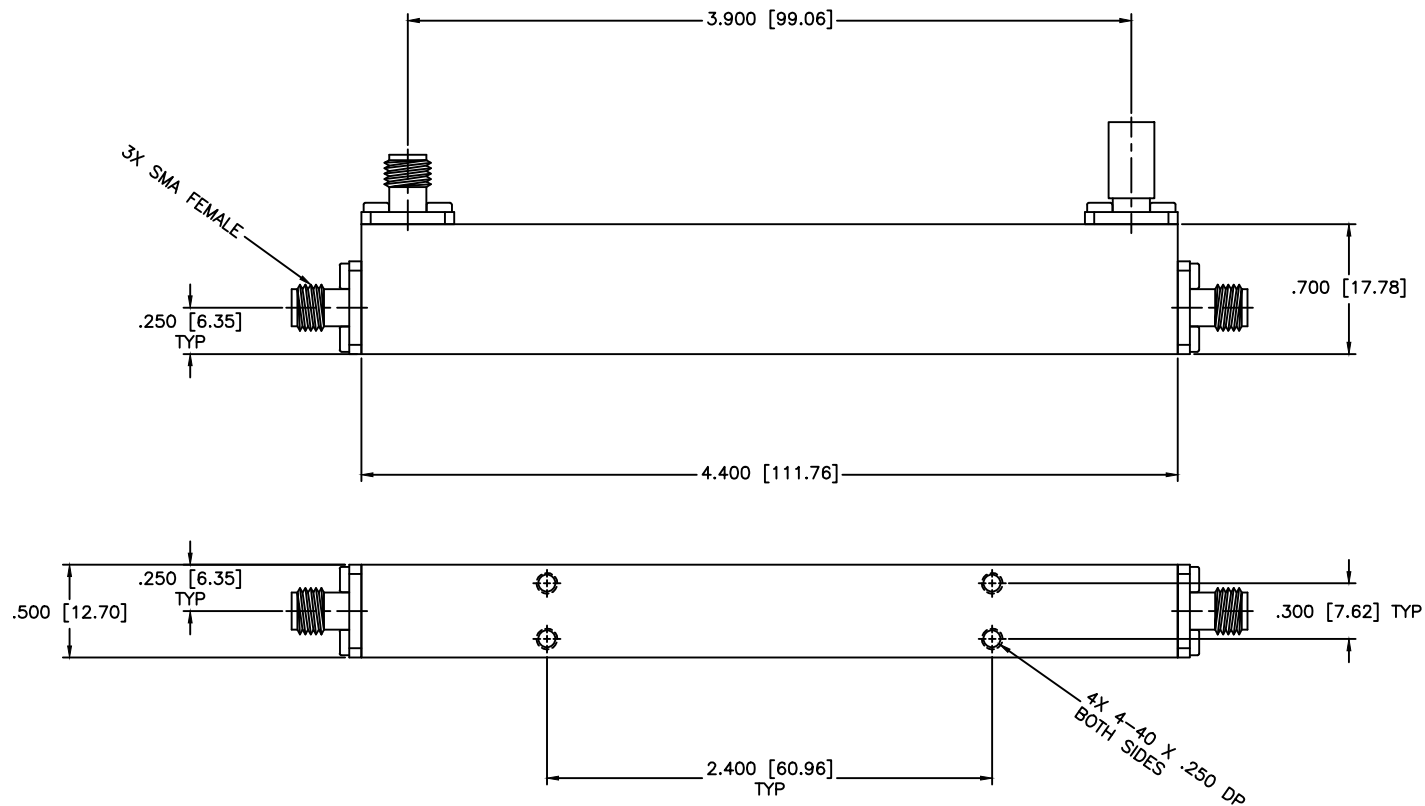

SPECIFICATIONS

Frequency Range: 0.4–6 GHz
 VSWR: 1.15:1 Max.
 Coupling: 20±1.2dB
 Insertion Loss: 0.85dB Max.
 Directivity: 20dB Min, 20dB Typ.
 Frequency Sensitivity: ±0.8dB Typ. ±1.0dB Max.
 Power: 20W
 Operating Temperature: -40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. CB22-20		
DATE: 09-10-2020		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 09-10-2020		SIZE: N/A
THIRD ANGLE PROJECTION		REV: B		DWG NO. 86850
DO NOT SCALE THE DRAWING				