


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

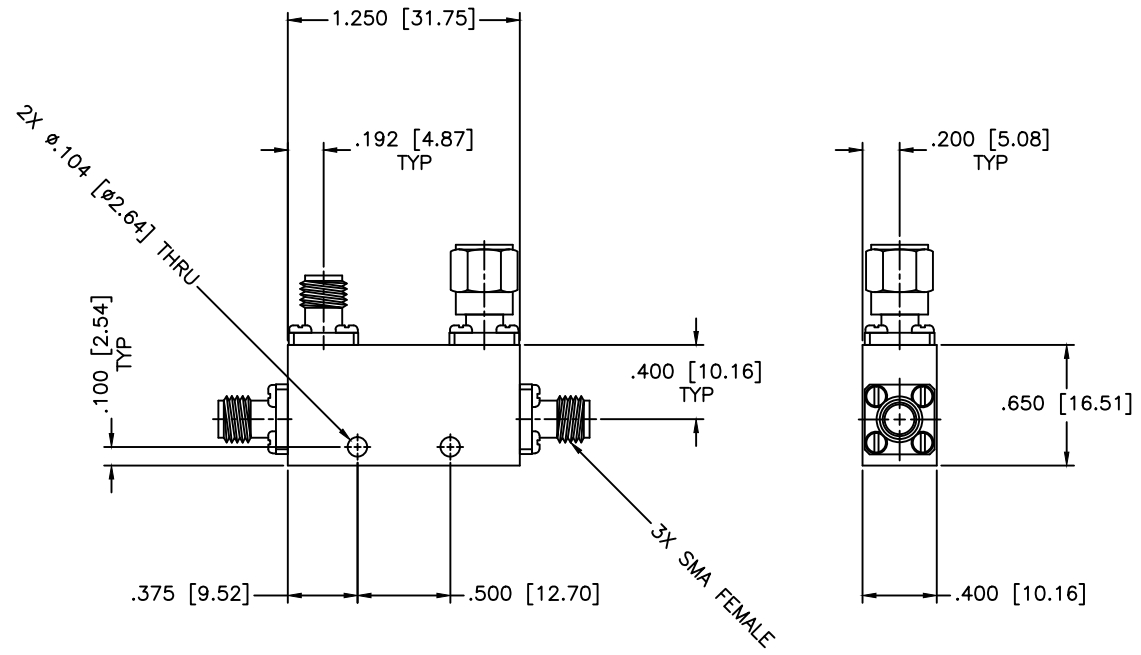

SPECIFICATIONS

Frequency Range: 7–18 GHz
 Coupling: 6±1.0dB
 Frequency Sensitivity: ±0.5dB
 Insertion Loss: 2.0dB Max.
 Directivity: 12dB Min.
 VSWR: 1.40:1 Max.
 Power Incident, Reflected: 25W, 2W, 3kW Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:		N/A
DRAWN:		DATE:		PART NO.			DIRECTIONAL COUPLER CB5-6
Paboon Luekhamhan APPROVED: T. Nguyen		05-17-2004 05-17-2004		CAGE CODE:		SIZE: A REV: N/A DWG NO.	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		0D2L5 DO NOT SCALE THE DRAWING		80520	