


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

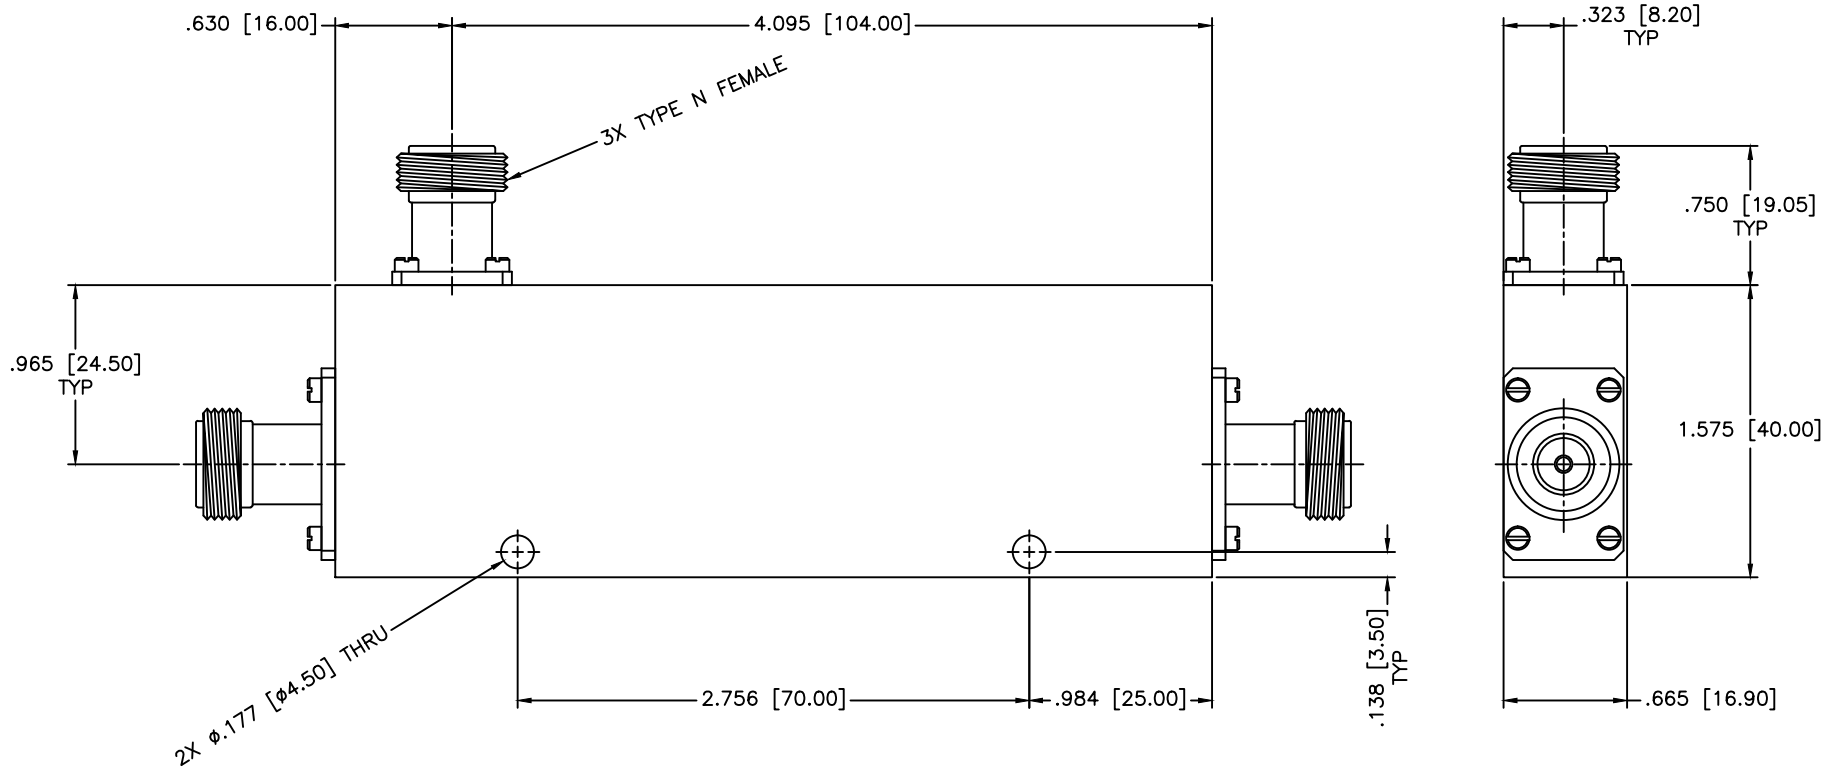

SPECIFICATIONS

Frequency Range: 800–2500 MHz
 Coupling: 10±0.8dB
 Insertion Loss: 1.0dB Max.
 Power Rating: 200W
 VSWR: 1.25:1 Max.
 Operating Temperature: -40°C to +60°C

MATERIAL:	
DRAWN:	DATE:
Paioon Luekhamhan	07-19-2006
APPROVED:	DATE:
T. Nguyen	07-19-2006

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: HIGH POWER DIRECTIONAL COUPLER		PART NO.		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CB59-10-200/NF		
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	A	N/A	82601	
DO NOT SCALE THE DRAWING				