


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

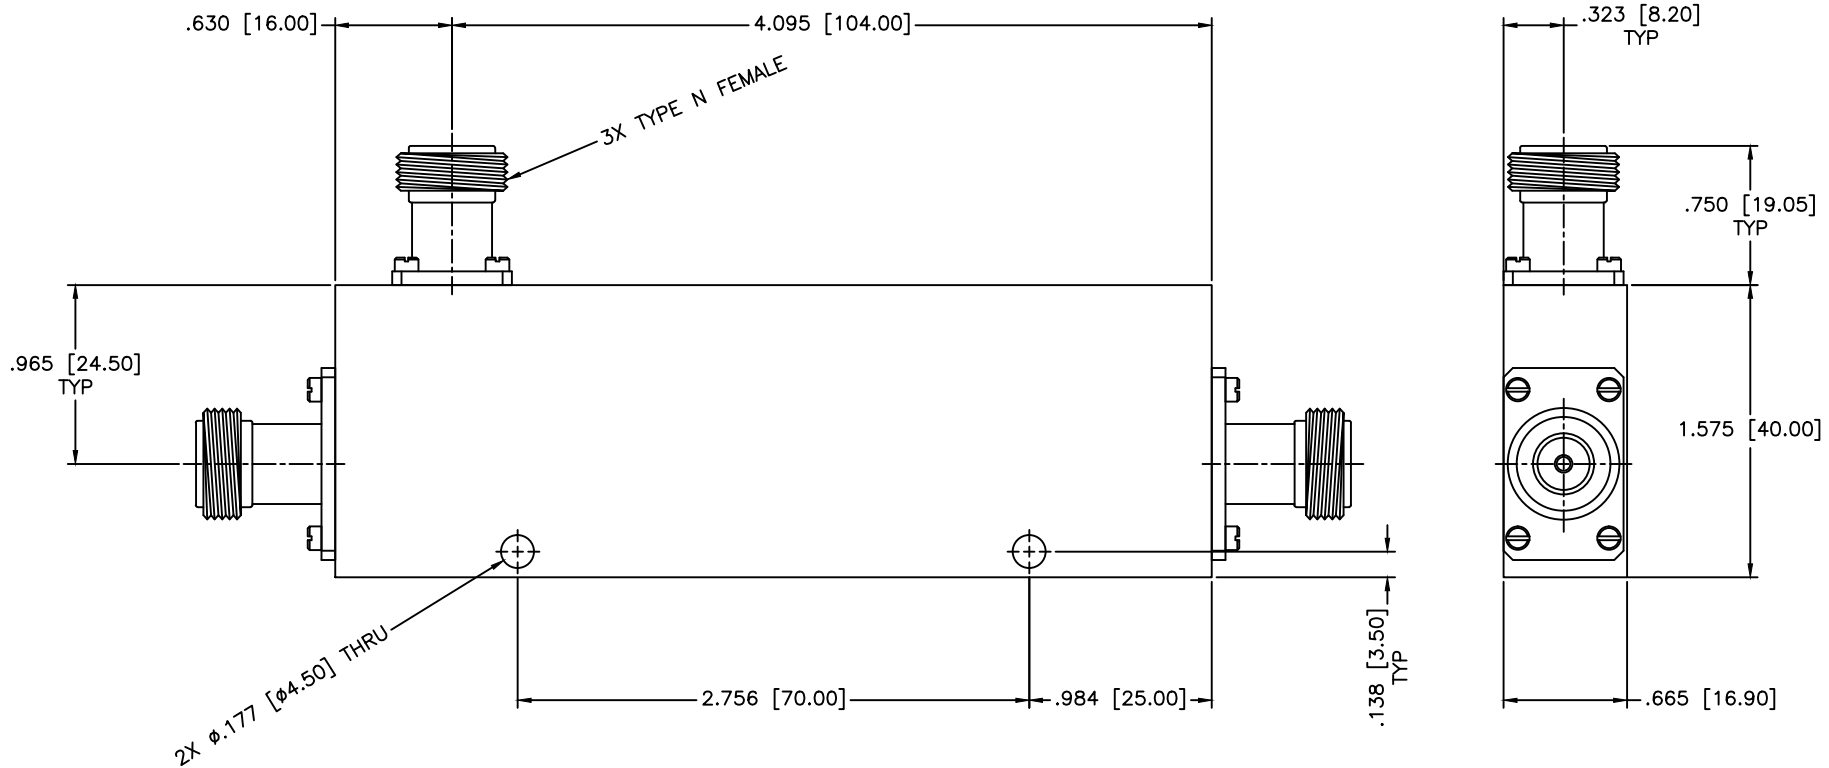

SPECIFICATIONS	
Frequency Range:	800–2500 MHz
Coupling:	6 ± 1.5 dB
Insertion Loss:	2.2 dB Max.
Power Rating:	200W
VSWR:	1.25:1 Max.
Operating Temperature:	-40°C to +60°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE:		SHEET:	N/A
DRAWN:		PART NO.		HIGH POWER DIRECTIONAL COUPLER		
DATE:		CAGE CODE:		CB59-6-200/NF		
APPROVED:		SIZE:		DWG NO.		
T. Nguyen		A		82600		
DATE:		REV:		DO NOT SCALE THE DRAWING		
07-19-2006		N/A				
THIRD ANGLE PROJECTION		OD2L5				