


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

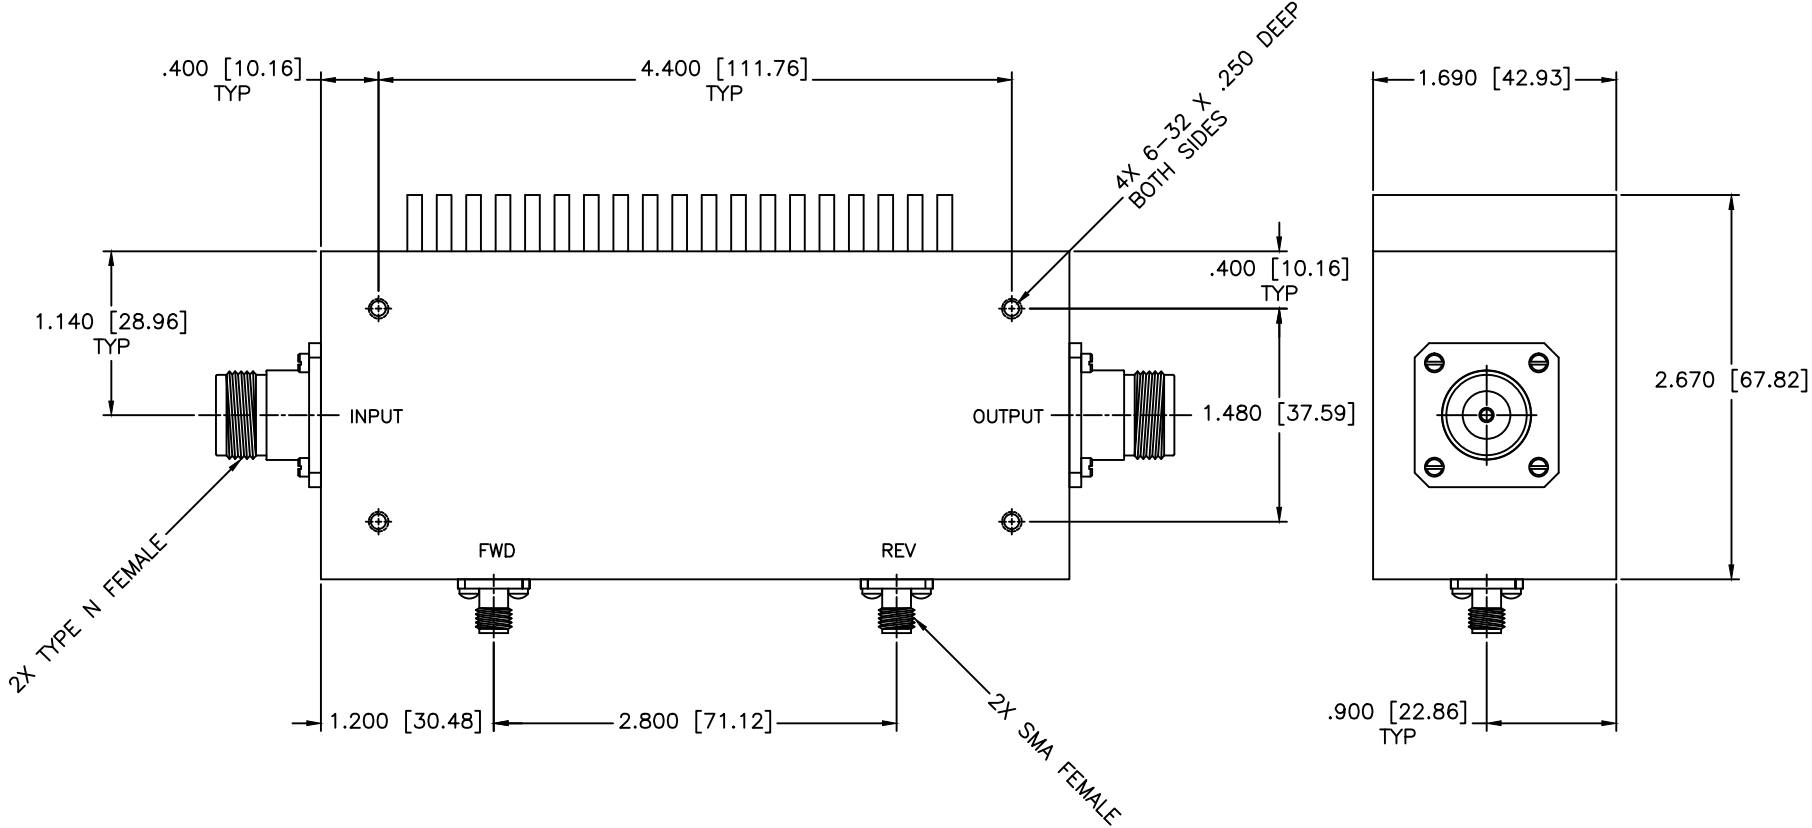

SPECIFICATIONS

- FREQUENCY RANGE: .010-400 MHz
- POWER: 200 Watts CW
- INSERTION LOSS: 0.50dB Max.
- VSWR: 1.25:1 Max.
- FLATNESS: ±0.5dB Max.
- DIRECTIVITY: 20dB Min.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 40dB DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		PART NO.: CL12-40/200	
DATE: 09-24-2005		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: N/A	REV: N/A
DATE: 09-24-2005		DWG NO.: 82414	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	