


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

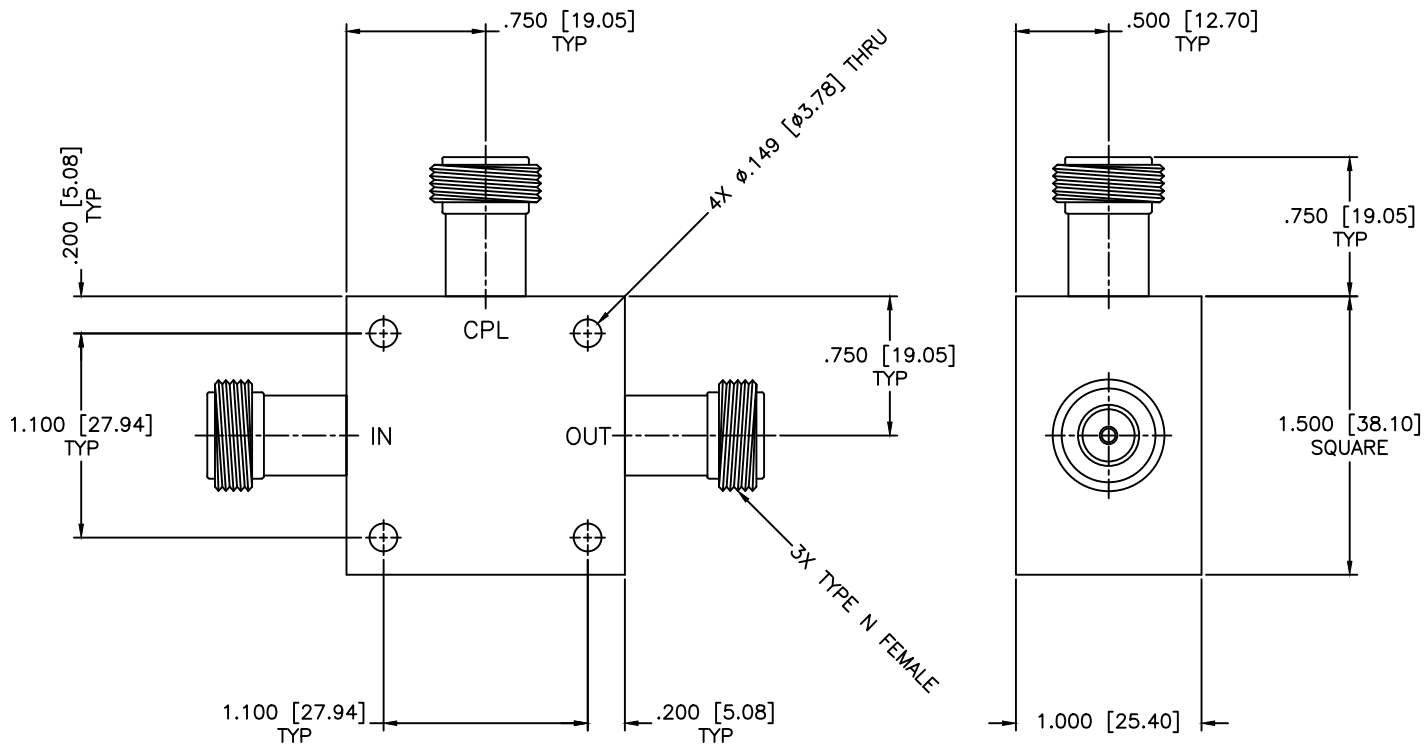

**SPECIFICATIONS**

Frequency Range: 0.1–50 MHz  
 Coupling: 15±0.5dB  
 Insertion Loss: 0.5dB Max.  
 Flatness: ±0.25dB  
 Directivity: 25dB Min.  
 VSWR: 1.20:1 Max.  
 Operating Temperature: -55°C to +85°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>DIRECTIONAL COUPLER</b>	
DRAWN: Paiboon Luekhamhan		PART NO. <b>CL2-16/NF</b>	
DATE: 11-09-1997	DATE: 11-09-1997	CAGE CODE: OD2L5	SIZE: A
APPROVED: T. Nguyen	DATE: 11-09-1997	REV: N/A	REV: N/A
THIRD ANGLE PROJECTION		DWG NO. 80358	
		DO NOT SCALE THE DRAWING	