


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

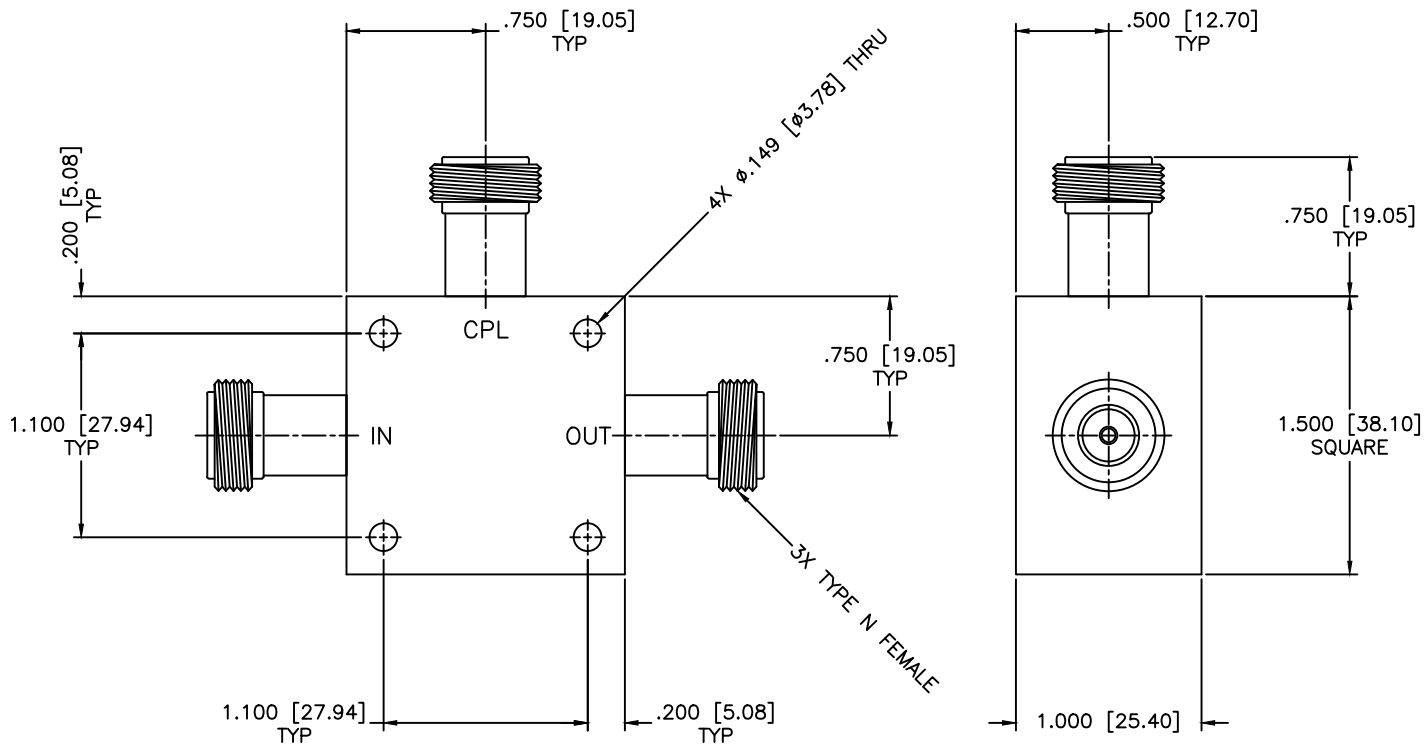

SPECIFICATIONS

Frequency Range: 0.1–50 MHz
 Coupling: 20±0.5dB
 Insertion Loss: 0.4dB Max.
 Flatness: ±0.25dB
 Directivity: 20dB Min.
 VSWR: 1.20:1 Max.
 Operating Temperature: –55°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-09-1997
APPROVED: T. Nguyen	DATE: 11-09-1997

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	DIRECTIONAL COUPLER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:	CL2-20/NF	
CAGE CODE:	SIZE:	REV:	DWG NO.:	
OD2L5	A	N/A	80359	DO NOT SCALE THE DRAWING