


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

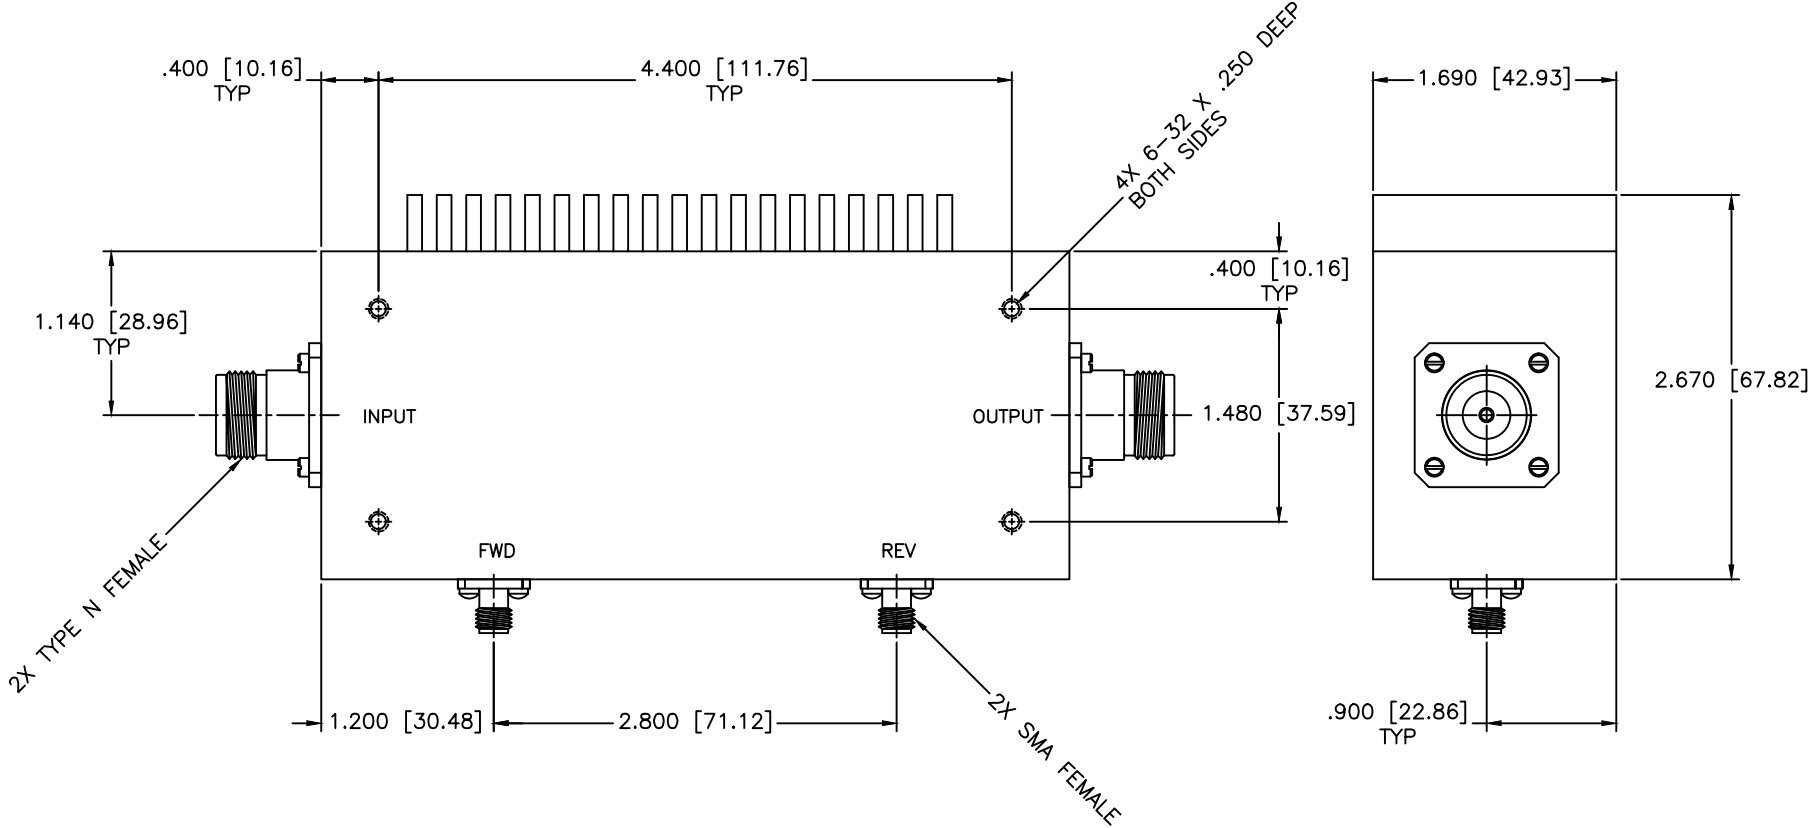

SPECIFICATIONS

FREQUENCY RANGE: 20–500 MHz
 POWER: 50 Watts CW
 INSERTION LOSS: 0.9dB Max.
 VSWR: 1.20:1 Max.
 FLATNESS: ±0.5dB Max.
 DIRECTIVITY: 20dB Min.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-25-2006
APPROVED: T. Nguyen	DATE: 04-25-2006

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: 30dB DUAL DIRECTIONAL COUPLER		PART NO.: CL23-30/NF		
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A	DWG NO.: 82539
DO NOT SCALE THE DRAWING				

THIRD ANGLE PROJECTION