


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

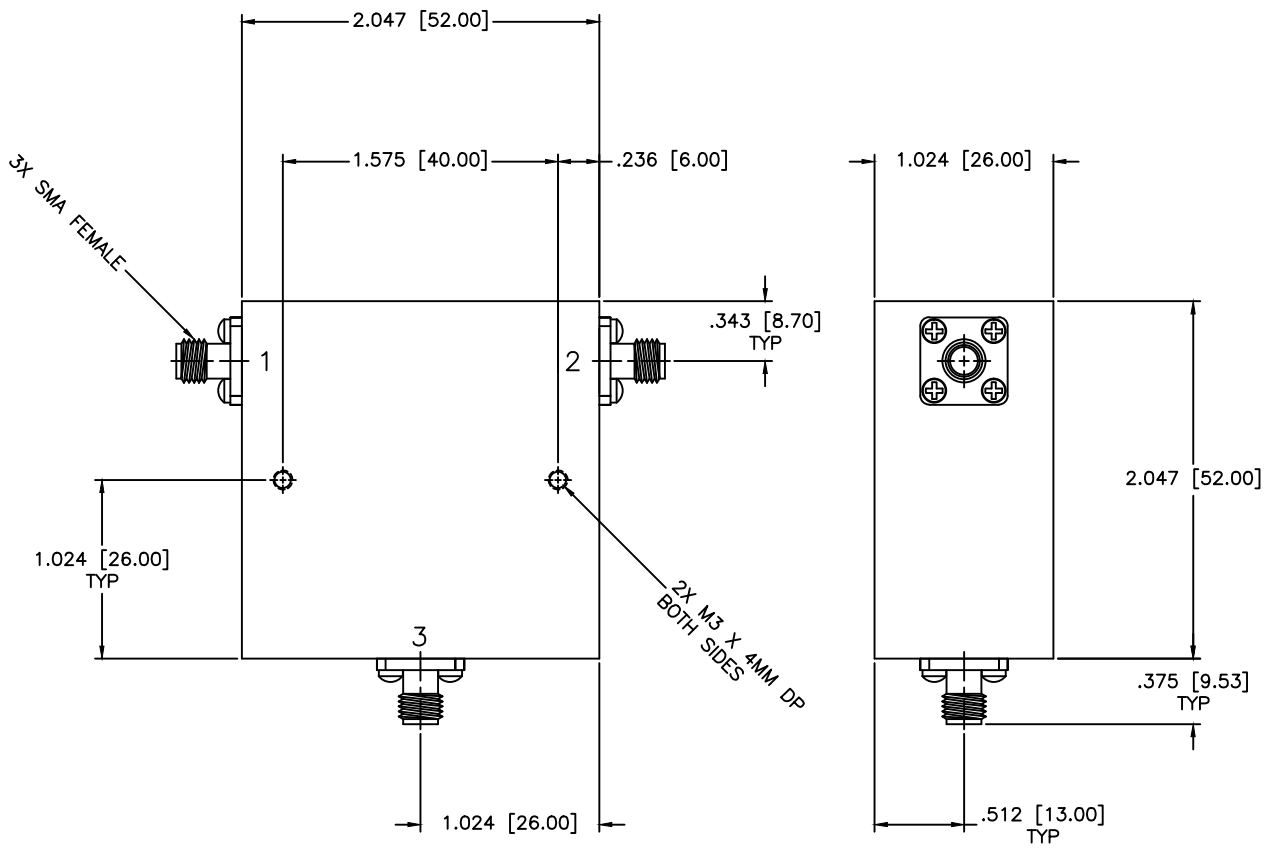

SPECIFICATIONS

Frequency Range: 0.7–1.0 GHz
 Isolation: 15dB Min.
 Insertion loss: 0.95dB Max.
 VSWR: 1.55:1 Max.
 Operating Temperature: 0°C to +50°C
 Power: 100W Avg, 500W Peak

MATERIAL:	
DRAWN: Paiboon Luexhamhan	DATE: 02-07-2011
APPROVED: T. Nguyen	DATE: 02-07-2011

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: COAXIAL CIRCULATOR		PART NO. CS-112	
CAGE CODE: OD2L5		SIZE: C DO NOT SCALE THE DRAWING	REV: B DWG NO. 84863

