


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

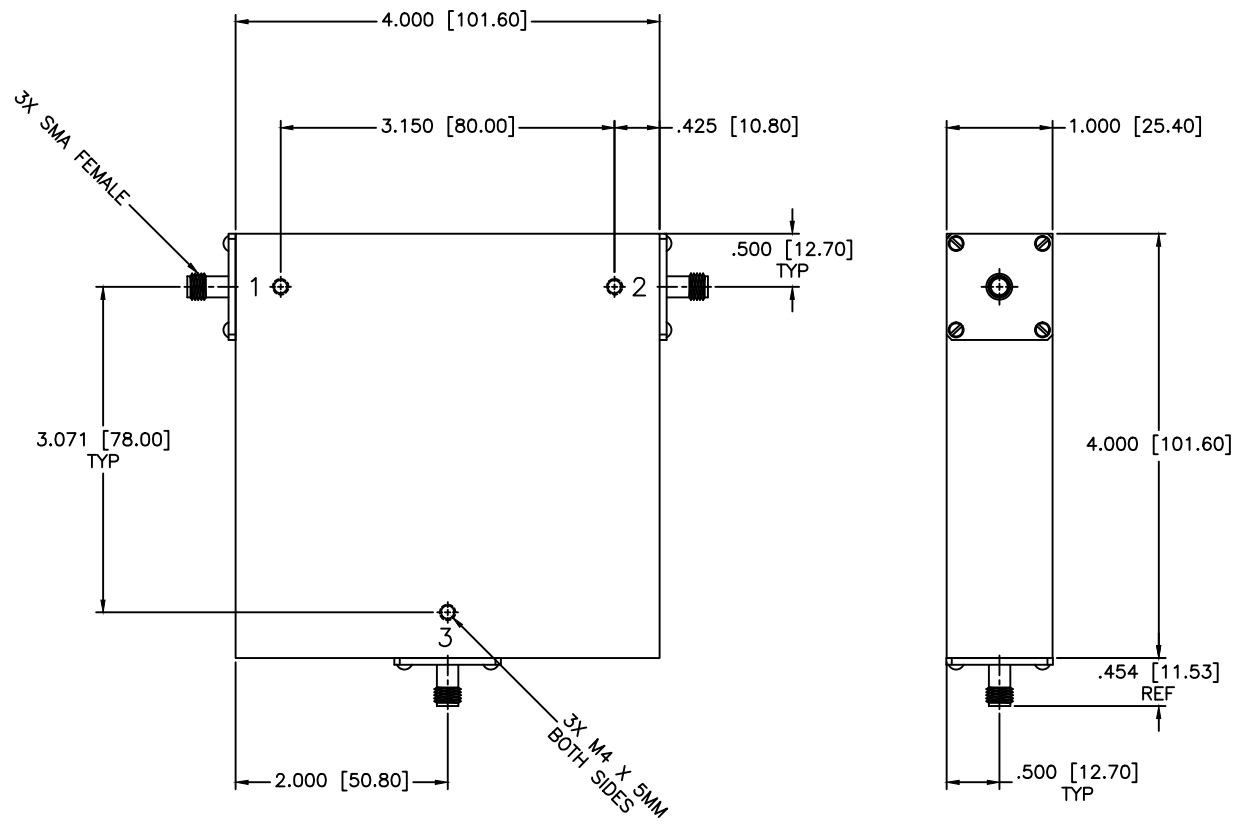

**SPECIFICATIONS**

Frequency Range: 0.7–1.4 GHz  
 Power Avg: 10 Watts  
 Power Peak: 100 Watts  
 Operating Temperature: +10°C to +40°C  
 Isolation: 18dB Min.  
 Insertion loss: 0.5dB Max.  
 VSWR: 1.30:1 Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://www.mcli.com	SCALE:	N/A
DRAWING TITLE:			DRAWING TITLE:	COAXIAL CIRCULATOR
TOLERANCES:		<small>UNLESS OTHERWISE SPECIFIED:          TOLERANCES          IN (INCHES) OR (mm) (MILLIMETERS)          FRACTIONS: ± 1/64          DECIMALS: ± .02 ± .015          ANGLE: ± 1/2°</small>	PART NO.:	CS-128
DATE:	04-22-2010		CAGE CODE:	OD2L5
APPROVED:	T. Nguyen	DATE:	04-22-2010	SIZE: N/A
DRAWN: Paiboon Luakhamhan		REV: N/A		DWG NO.:
APPROVED: T. Nguyen		DO NOT SCALE THE DRAWING		84763