


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

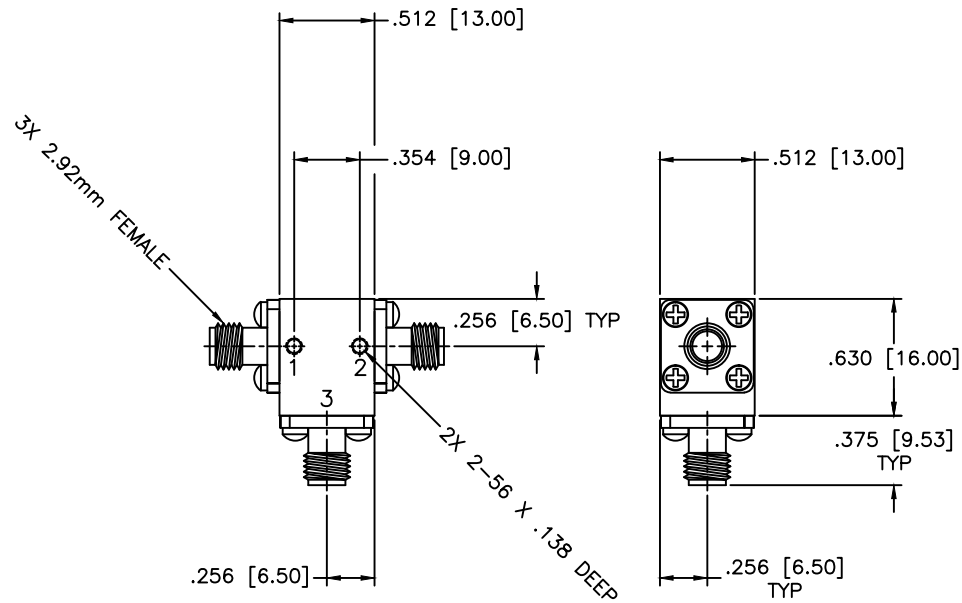

SPECIFICATIONS

Frequency Range: 37–38 GHz
 Isolation: 20dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.50:1 Max.
 Power: 1W Avg.
 Operating Temperature: -10°C to +60°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: COAXIAL CIRCULATOR	
DRAWN: Paiboon Luekhamhan		DATE: 08-16-2011	PART NO. CS-150	
APPROVED: T. Nguyen		DATE: 08-16-2011	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. 85846
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	