


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

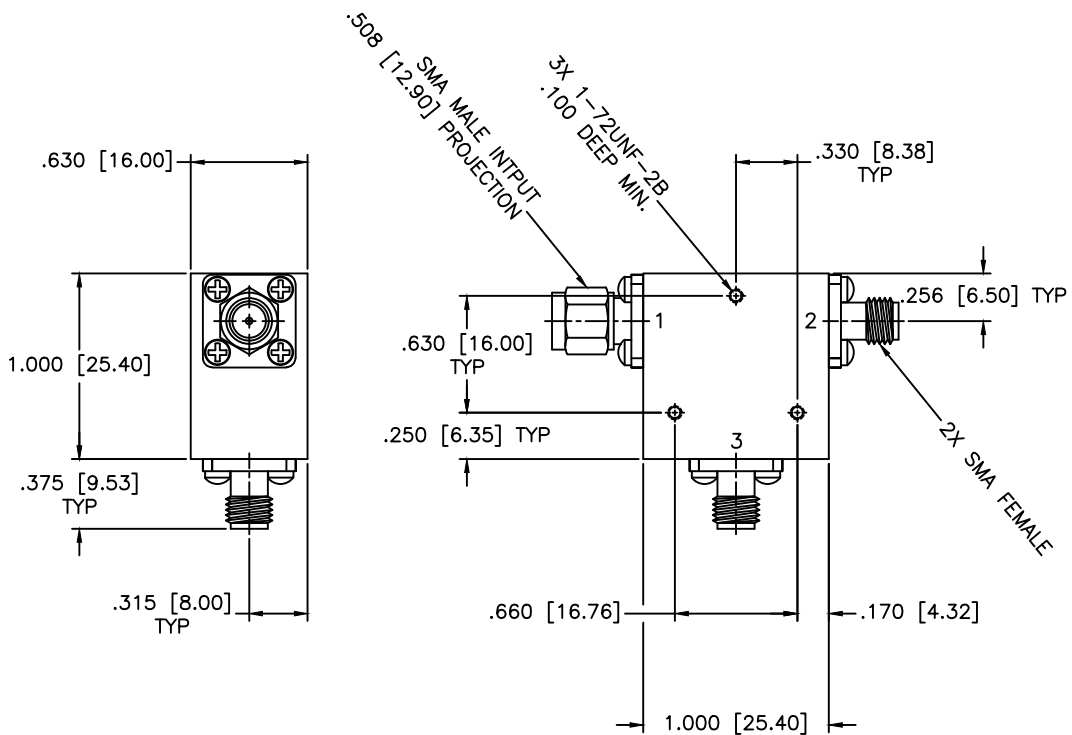

**SPECIFICATIONS**

Frequency Range: 4.40–5.00 GHz  
 Isolation: 25dB Min.  
 Insertion loss: 0.20dB Max.  
 VSWR: 1.20:1 Max.  
 Power: 15 Watts  
 Operating Temperature: -10°C to +60°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.009 ANGLE: ±1/2°	DRAWING TITLE: <b>COAXIAL CIRCULATOR</b>	
DRAWN: Paiboon Luekhamhan		DATE: 02-08-2017	PART NO.: <b>CS-181-S/SMI</b>	
APPROVED: T. Nguyen		DATE: 02-08-2017	CAGE CODE: OD2L5	SIZE: A
		THIRD ANGLE PROJECTION 	REV: N/A	DWG NO.: XXXXX
		DO NOT SCALE THE DRAWING		