


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

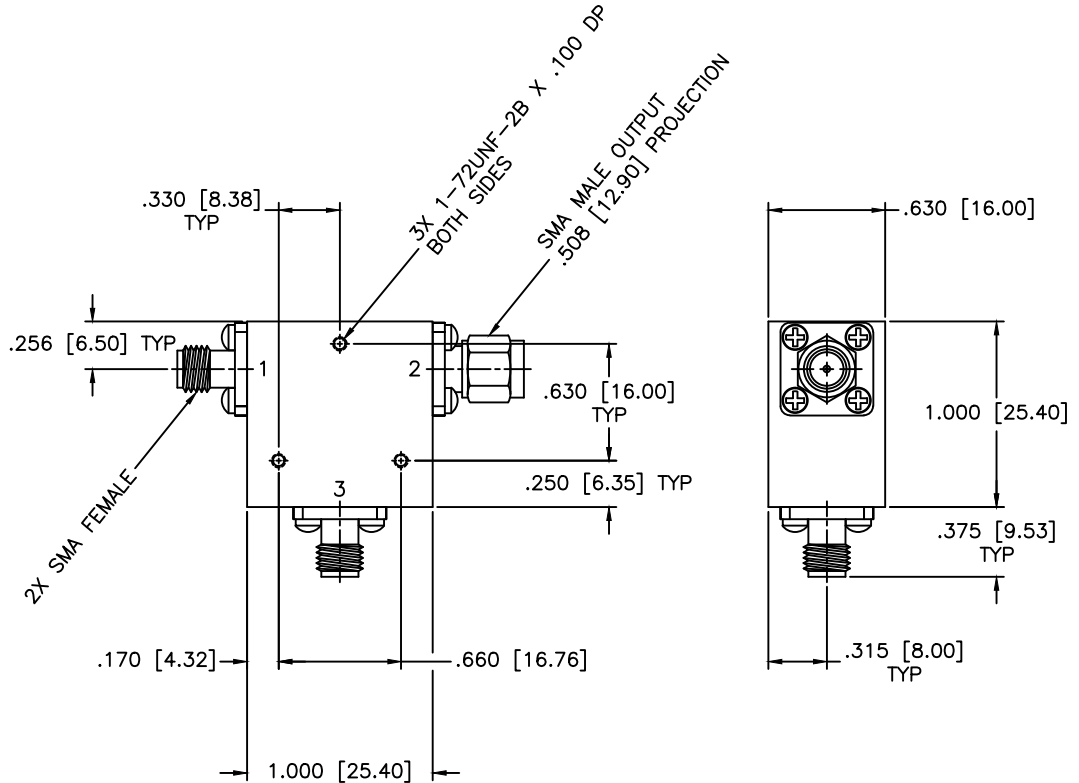

**SPECIFICATIONS**

Frequency Range: 4.40-5.00 GHz  
 Isolation: 25dB Min.  
 Insertion loss: 0.20dB Max.  
 VSWR: 1.20:1 Max.  
 Power: 15 Watts  
 Operating Temperature: -10°C to +60°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.009 ANGLE: ±1/2°		DRAWING TITLE: <b>COAXIAL CIRCULATOR</b>	
DRAWN: Paiboon Luekhamhan DATE: 01/26/2016		PART NO.: CS-181-S/SMO	
APPROVED: T. Nguyen DATE: 01/26/2015		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. XXXXX
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	