


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

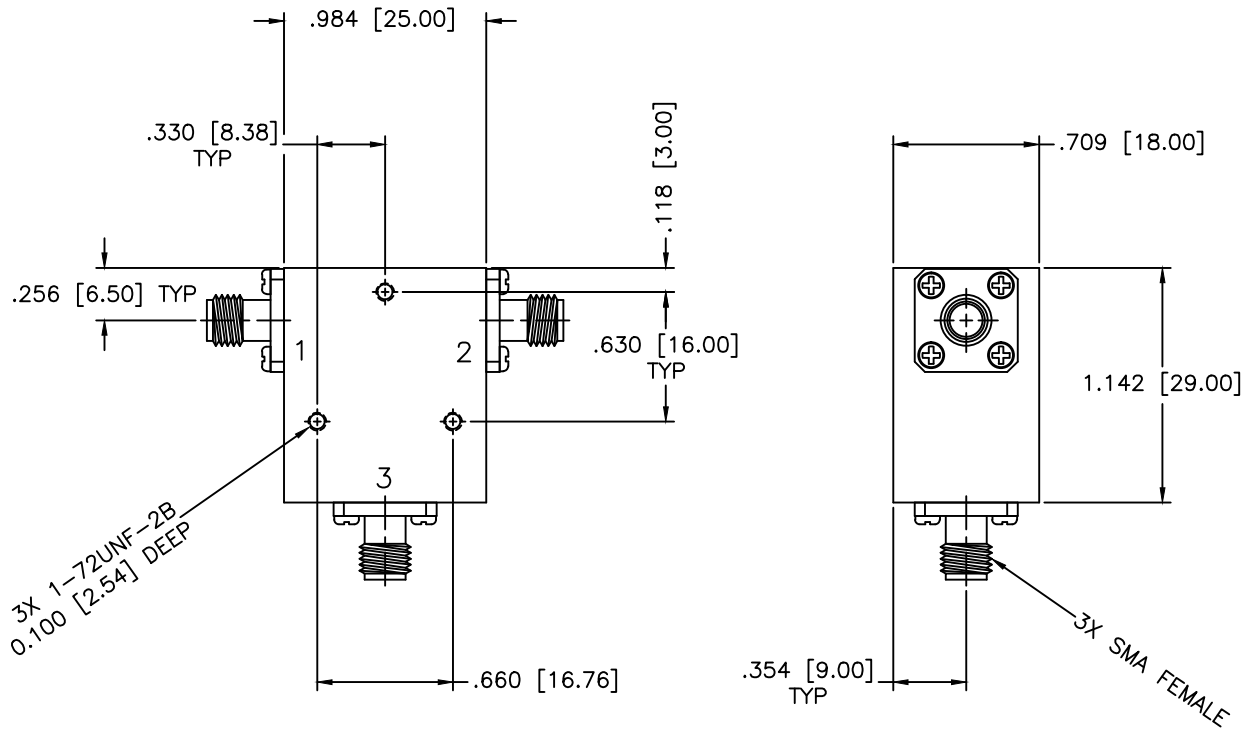

SPECIFICATIONS

Frequency Range: 4.4–5.0 GHz
 Isolation: 25dB Min.
 Insertion loss: 0.15dB Max.
 VSWR: 1.20:1 Max.
 Power: 15 Watts
 Operating temperature: 0°C to +50°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.009 ANGLE: ±1/2°				DRAWING TITLE:	COAXIAL CIRCULATOR
DRAWN:		DATE:		PART NO.	CS-181-S
Paiboon Luekhamhan DATE: 02-08-2017		<small>PROPRIETARY NOTING: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> THIRD ANGLE PROJECTION		CAGE CODE:	OD2L5
APPROVED:		DATE:		SIZE:	N/A
T. Nguyen DATE: 02-08-2017				REV:	N/A
				DWG NO.	XXXXX
DO NOT SCALE THE DRAWING					