


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

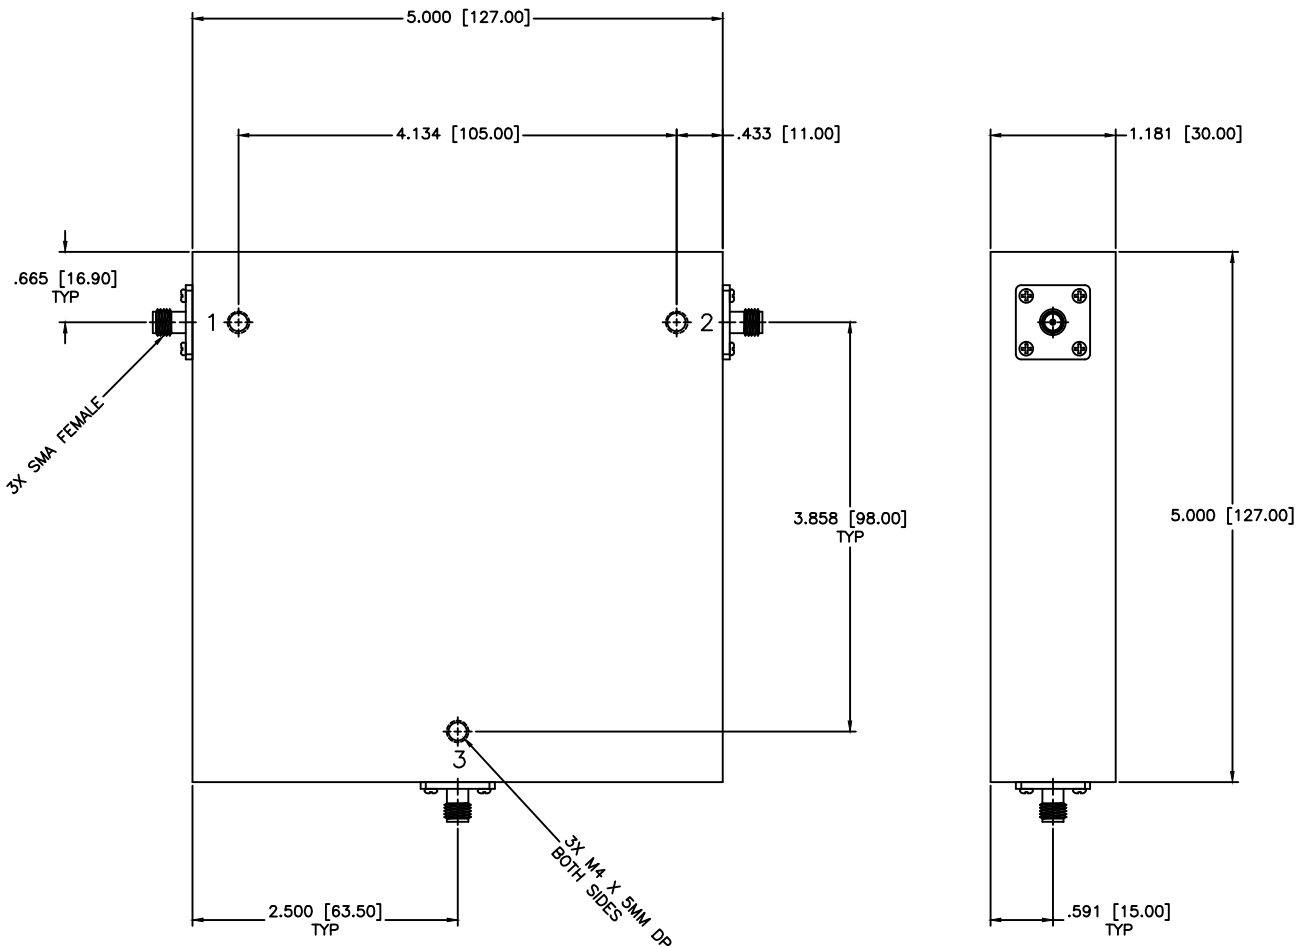

**SPECIFICATIONS**

Frequency Range: 600–900 MHz  
 Isolation: 20dB Min.  
 Insertion loss: 0.5dB Max.  
 VSWR: 1.20:1 Max.  
 Operating Temperature: +10°C to +40°C  
 Power Average, Peak: 100W, 500W

DRAWING: Paboon Luethanhan APPROVED: T. Nguyen	DATE: 11-22-2013 DATE: 11-22-2013	<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8284 FAX: (727) 381-8118 WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
		DRAWING TITLE: COAXIAL CIRCULATOR	PART NO.: CS-192
		CAGE CODE: 0D2L5	REVISION: N/A REV: N/A DRAWING NO.: 86445
			DO NOT SCALE THE DRAWING

