


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

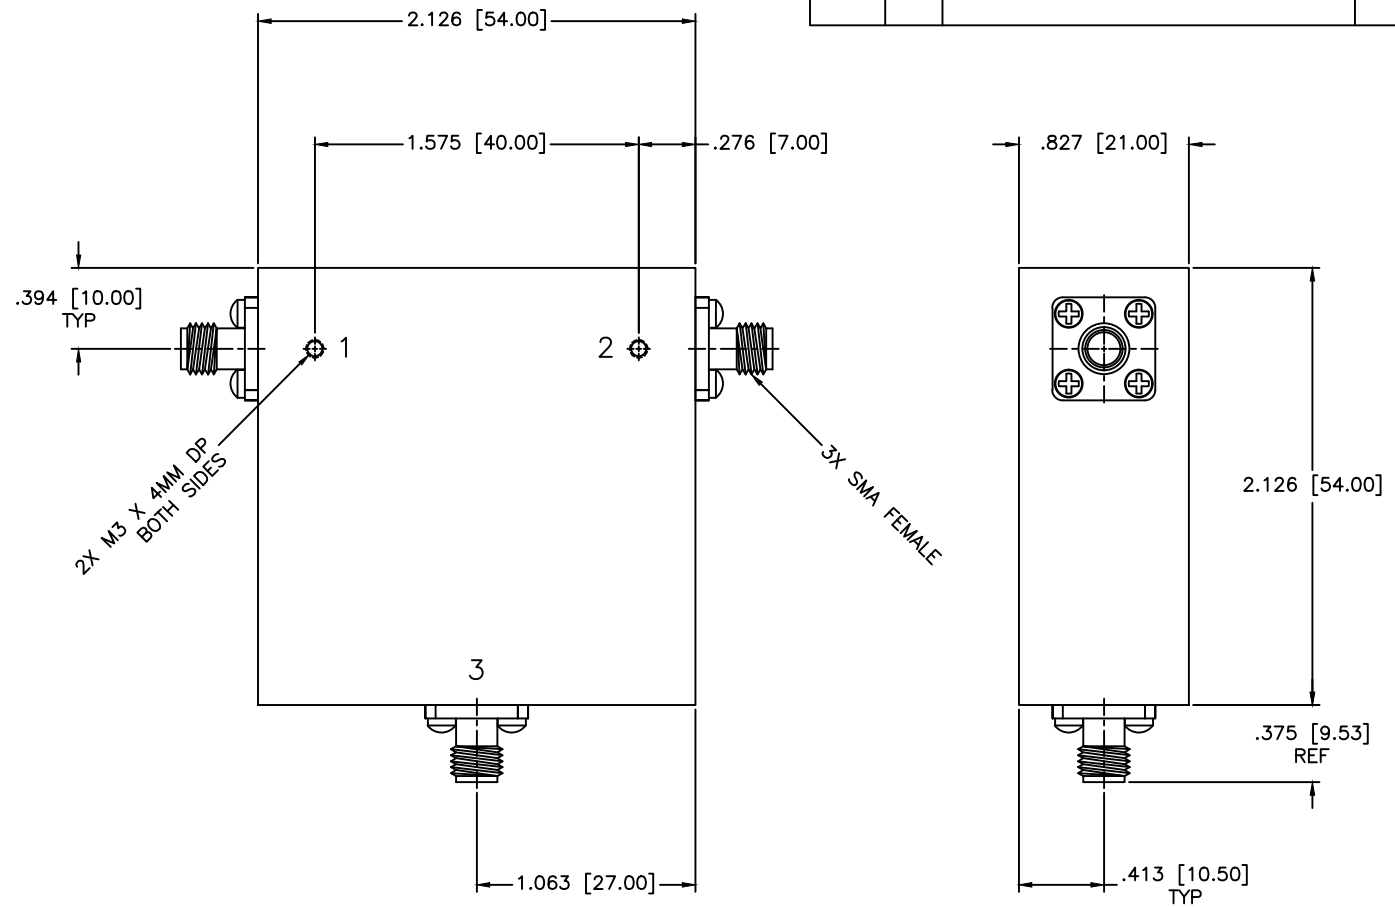

SPECIFICATIONS

Frequency Range: 1.7–2.5 GHz
 Isolation: 25dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.15:1 Max.
 Power Average: 150 Watts
 Operating Temperature: +10°C to +40°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 08-07-2013
APPROVED: T. Nguyen	DATE: 08-07-2013

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
COAXIAL CIRCULATOR

PART NO.
CS-194

CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 86306
DO NOT SCALE THE DRAWING			

SCALE:	N/A
SHEET:	N/A

