


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

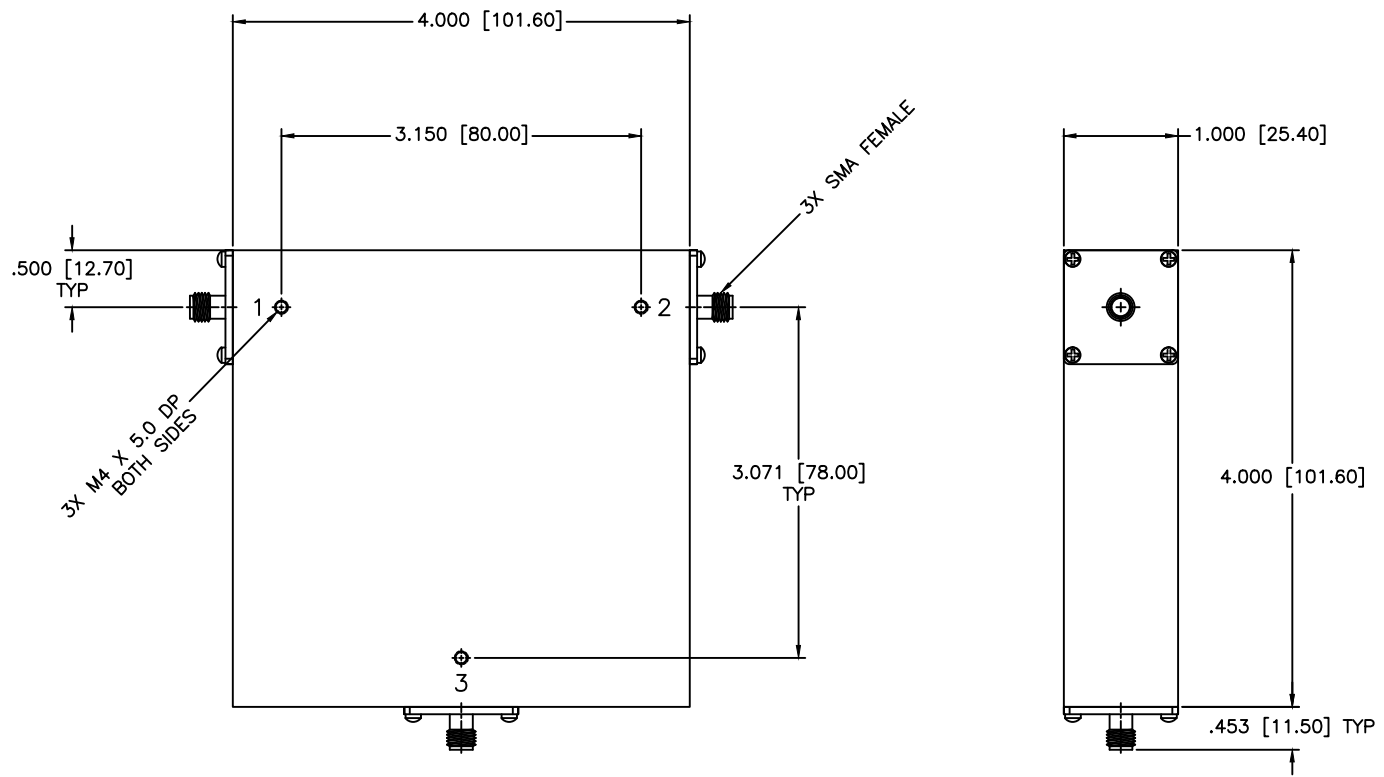

SPECIFICATIONS

Frequency Range: 0.70–2.70 GHz
 Isolation: 10dB Min.
 Insertion loss: 1.9dB Max.
 VSWR: 1.92:1 Max.
 Power: 50 Watts
 Operating Temperature: +20°C to +30°C

MATERIAL:	DRAWING: Paiboon Luethamhan	DATE: 02-24-2016	MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-8254 FAX: (727) 381-8118 http://www.mcli.com	SCALE: N/A
				SHEET: N/A
APPROVED: T. Nguyen	DATE: 02-24-2016	<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°</small>	DRAWING TITLE: COAXIAL CIRCULATOR	
			PART NO.: CS-201	
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A	DWG NO.: 86610
DO NOT SCALE THE DRAWING				