


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

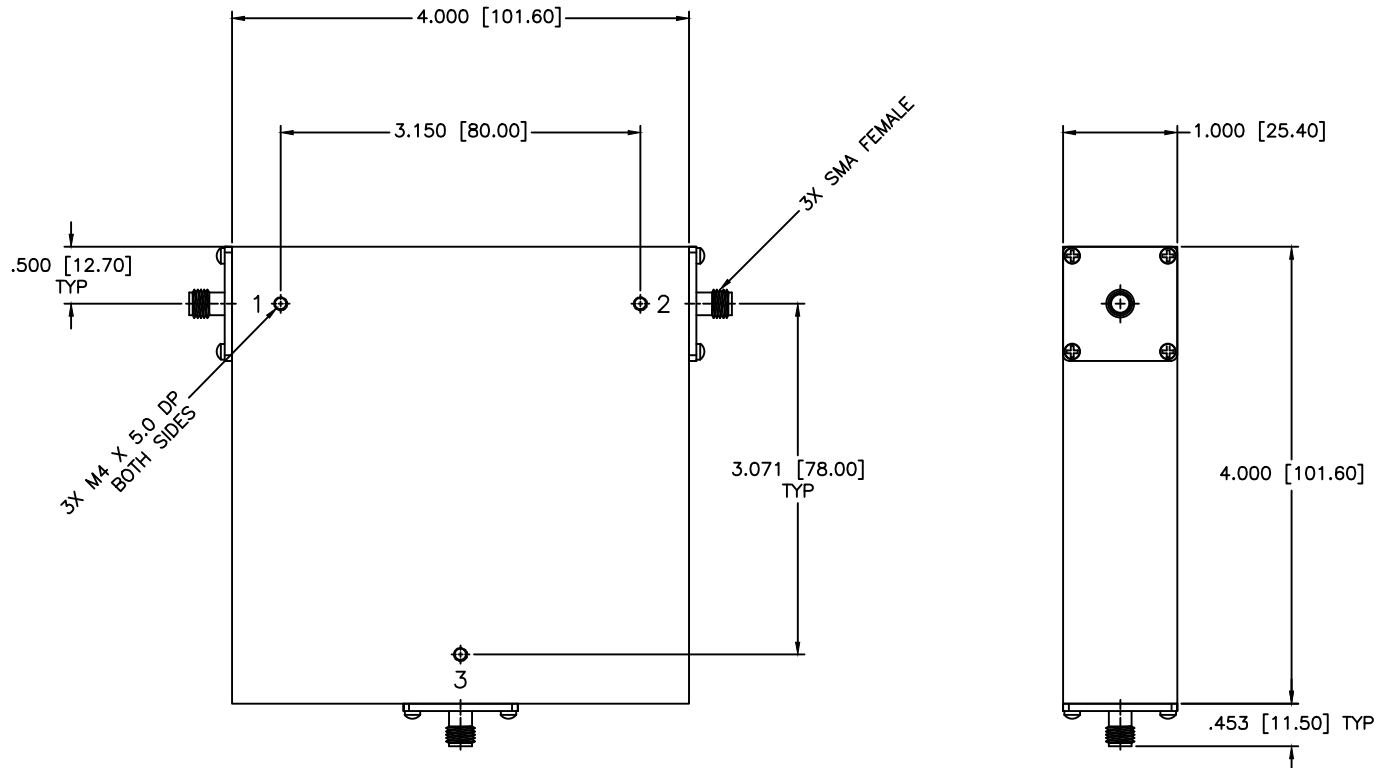

SPECIFICATIONS AT 25±3.°C

- Frequency Range: 0.70–2.00 GHz
- Isolation: 13dB Min.
- Insertion loss: 1.0dB Max.
- VSWR: 1.60:1 Max.
- Power: 10 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7265 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 351-6116 http://www.mcli.com	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°			DRAWING TITLE:	COAXIAL CIRCULATOR
DRAWN:	DATE:	PROPERTY NOTES: THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC.	PART NO.:	CS-202
APPROVED:	DATE:	THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5
Paiboon Luekhamhan T. Nguyen		05-17-2016	05-17-2016	SIZE: N/A REV: N/A DWG NO.: 86619 DO NOT SCALE THE DRAWING