REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

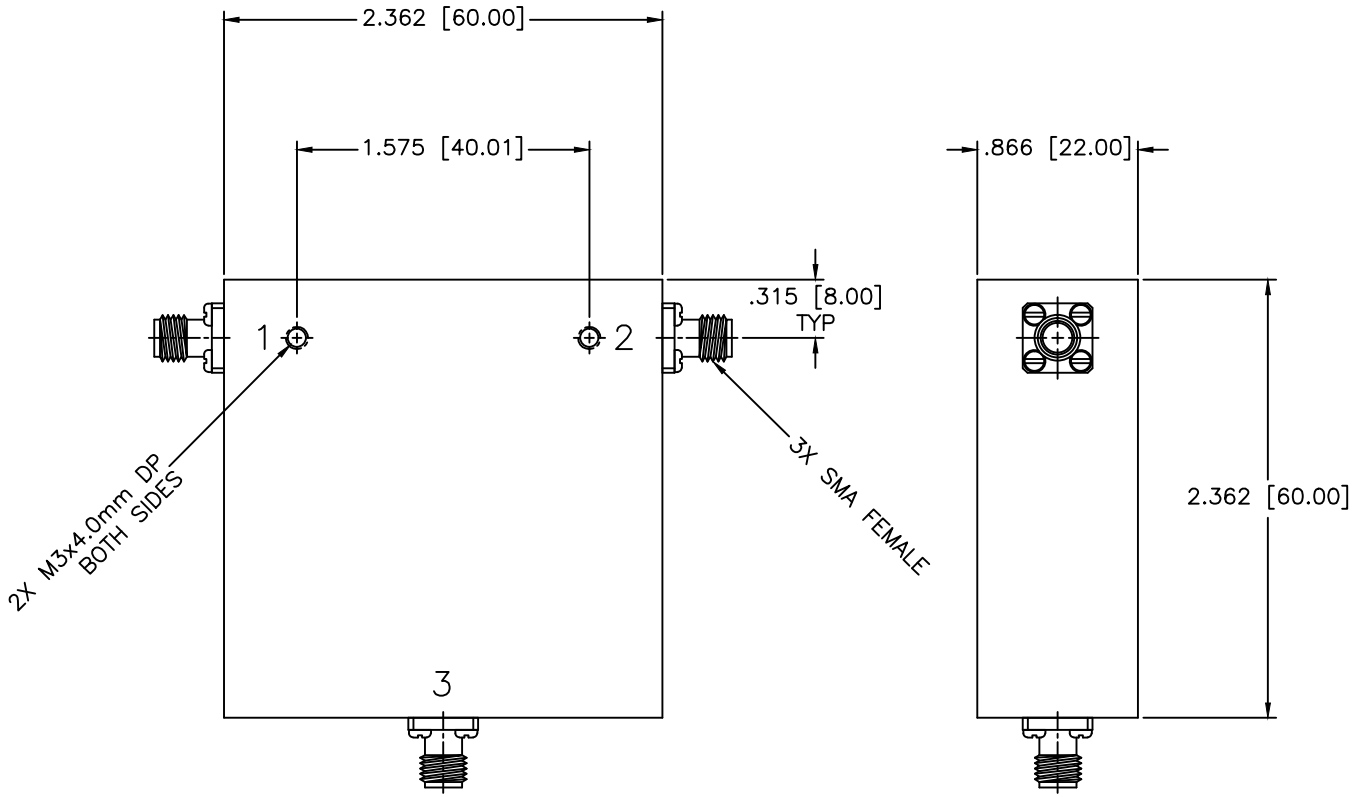

SPECIFICATIONS AT 25±5°C

Frequency Range: 1.3–2.8 GHz
Isolation: 17dB Min.
Insertion loss: 0.60dB Max.
VSWR: 1.35:1 Max.
Average Power: 50 Watts

MATERIAL:

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2'

DRAWING TITLE: COAXIAL CIRCULATOR

PART NO. CS-207

DRAWN: Paiboon Luekhamhan DATE: 11-09-2017

APPROVED: T. Nguyen DATE: 11-09-2017

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE: 0D2L5

SIZE: A REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 86698