


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

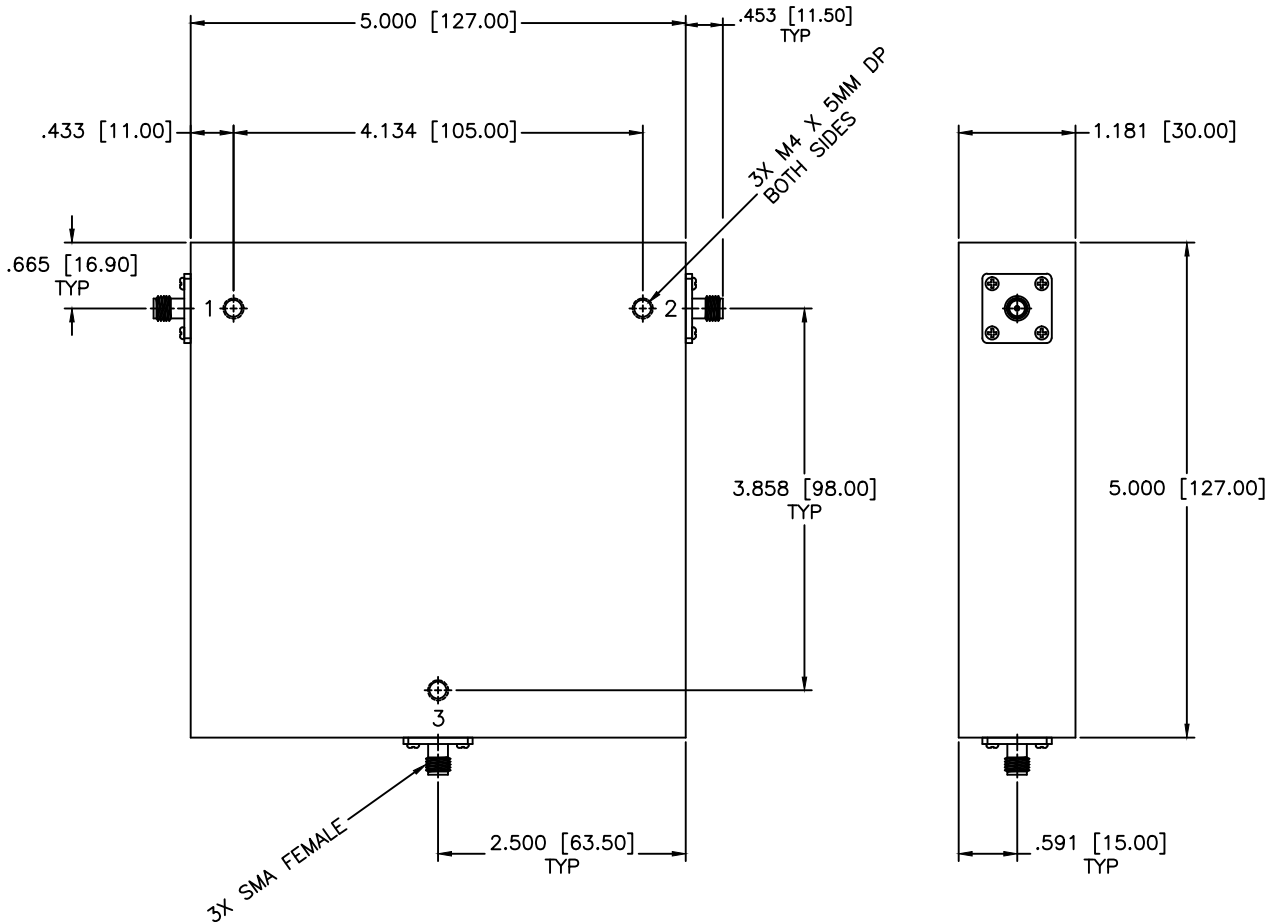

SPECIFICATIONS AT +25±5°C  
 Frequency Range: 0.55–1.10 GHz  
 Isolation: 20dB Min.  
 Insertion loss: 0.5dB Max.  
 VSWR: 1.25:1 Max.  
 Forward Power: 10 Watts  
 Reverse Power: 10 Watts

DRAWING: Paboon Luethamhan APPROVED: T. Nguyen	DATE: 09-02-2018 DATE: 09-02-2018	<b>MCLI</b> UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.1 ± 0.005 ANGLES: ± 1/2°	MICROWAVE COMMUNICATIONS LABORATORIES, INC. 7299 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8284 FAX: (727) 381-8118 WWW.MCLI.COM	QUANTITY: N/A SHEET: N/A
			DRAWING TITLE: <b>COAXIAL CIRCULATOR</b>	PART NO.: <b>CS-209</b>
CAGE CODE: 0D2L5	REVISION: C	AREA: N/A	DRAWING NO.: 86725	DO NOT SCALE THE DRAWING