


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

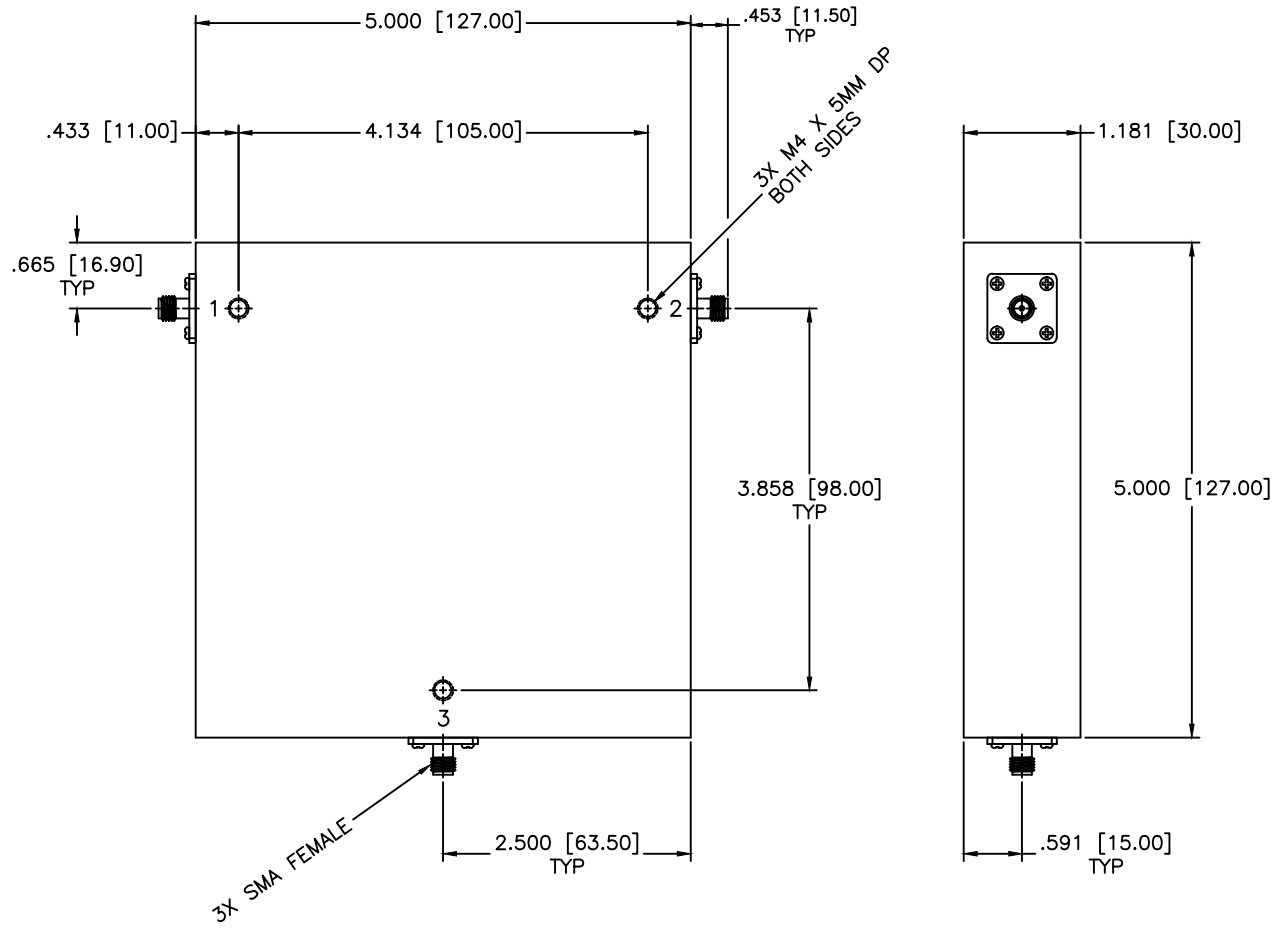

SPECIFICATIONS AT +25±5°C
 Frequency Range: 0.60–1.325 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.5dB Max.
 VSWR: 1.30:1 Max.
 Forward Power: 10 Watts
 Reverse Power: 10 Watts

DRAWING: Paboon Luethamhan APPROVED: T. Nguyen DATE: 02-02-2018 DATE: 02-02-2018	MCLI <small>UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLES: ±1/2°</small>	MICROWAVE COMMUNICATIONS LABORATORIES, INC. <small>7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8284 FAX: (727) 381-8118 WWW.MICCOM.COM</small>	SCALE: N/A SHEET: N/A
		DRAWING TITLE: COAXIAL CIRCULATOR	
GAGE CODE: 002L5		REVISION: C REVISION: N/A	DRAWING NO.: 86913

DO NOT SCALE THE DRAWING