


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

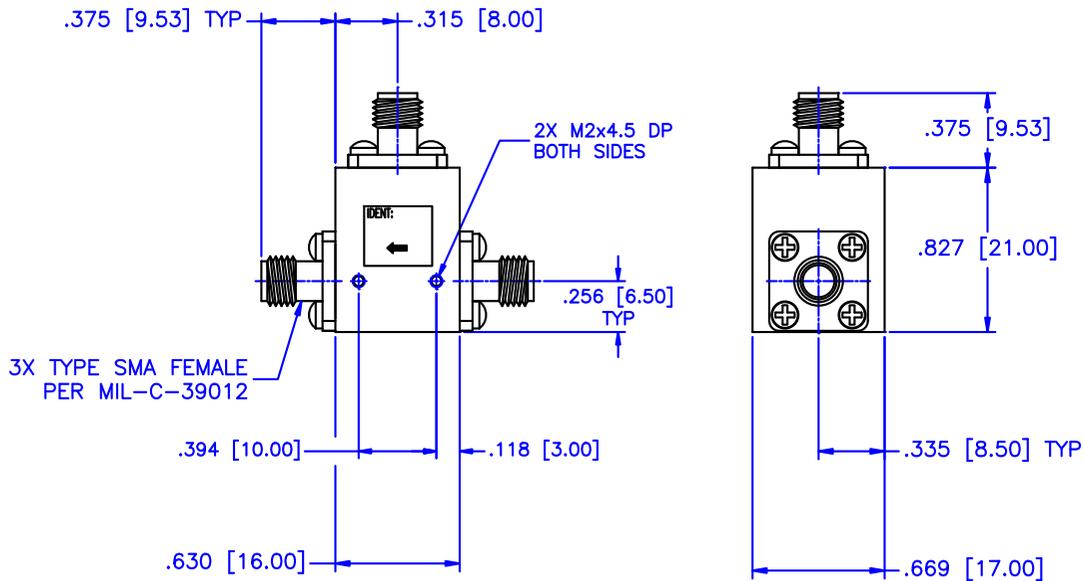

**SPECIFICATIONS:**

- Frequency Range: 6–12 GHz
- Isolation: 17dB Min.
- Insertion loss: 0.70dB Max.
- VSWR: 1.40:1 Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>COAXIAL CIRCULATOR</b>		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 05-17-2010		PART NO. <b>CS-24-1</b>		CAGE CODE: 0D2L5	
APPROVED: T. Nguyen		DATE: 05-17-2010		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A    REV: N/A    DWG NO.: 84790 DO NOT SCALE THE DRAWING	