


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

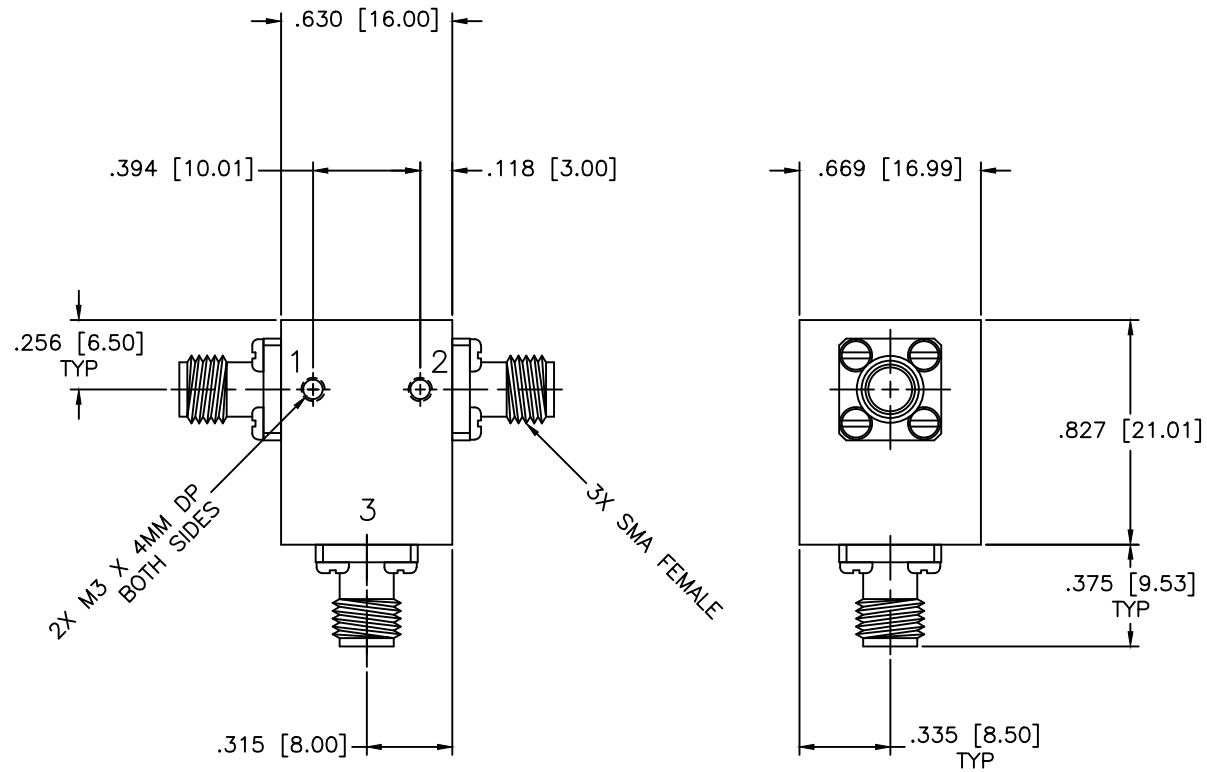

SPECIFICATIONS

Frequency Range: 8–16 GHz

Isolation: 17dB Min.

Insertion loss: 0.60dB Max.

VSWR: 1.35:1 Max.

Operating Temperature: -54°C to +85°C

Power: 15W Avg, 250W Peak.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 05-18-2010
APPROVED: T. Nguyen	DATE: 05-18-2010

MCLI UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2° <small>THIRD ANGLE PROJECTION</small>	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	DRAWING TITLE: <h3 style="text-align: center;">CIRCULATOR</h3>		SHEET: N/A
PART NO. <h2 style="text-align: center;">CS-28-15</h2>		CAGE CODE: OD2L5	DWG NO. 84817
FREQUENTLY MISSED: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A REV: N/A DO NOT SCALE THE DRAWING	