


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

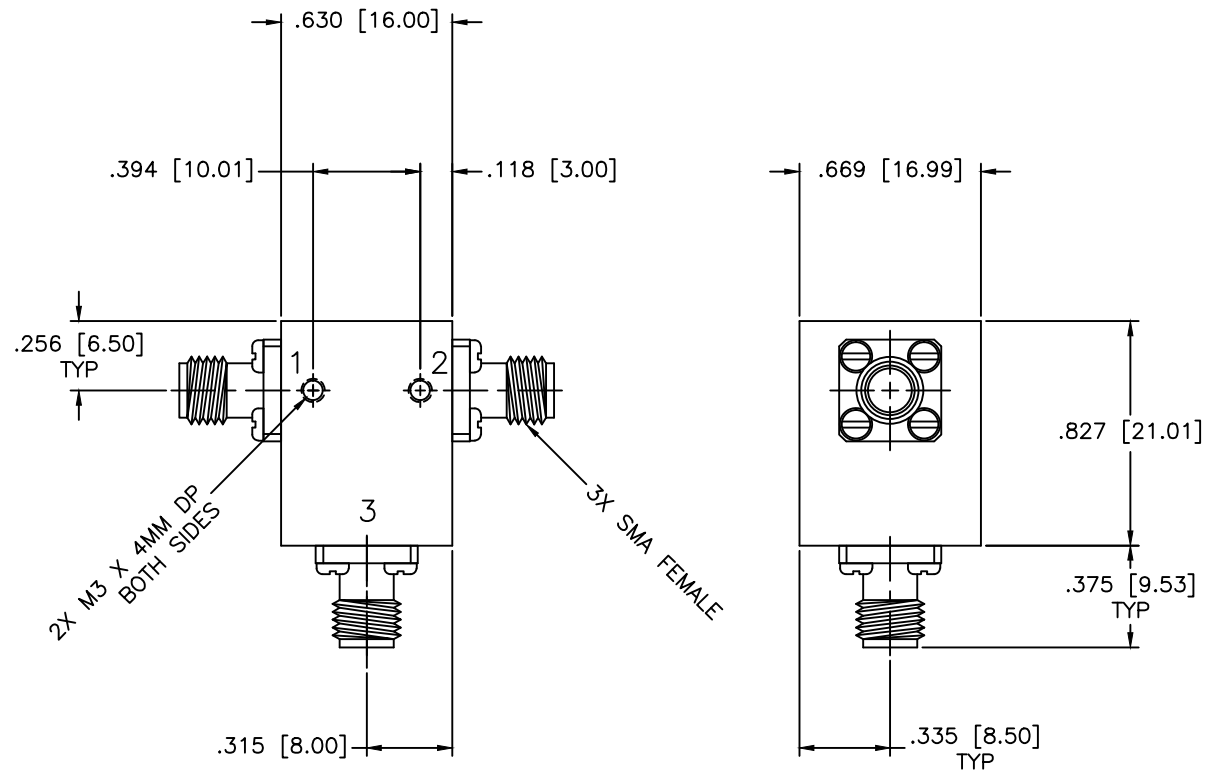

SPECIFICATIONS

Frequency Range: 8–16 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.60dB Max.
 VSWR: 1.35:1 Max.
 Operating Temperature: -54°C to +85°C
 Power: 25W Avg, 250W Peak.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 05-18-2010
APPROVED: T. Nguyen	DATE: 05-18-2010



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 544-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE: CIRCULATOR			
PART NO. CS-28-25			
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 84817
DO NOT SCALE THE DRAWING			

THIRD ANGLE PROJECTION