


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

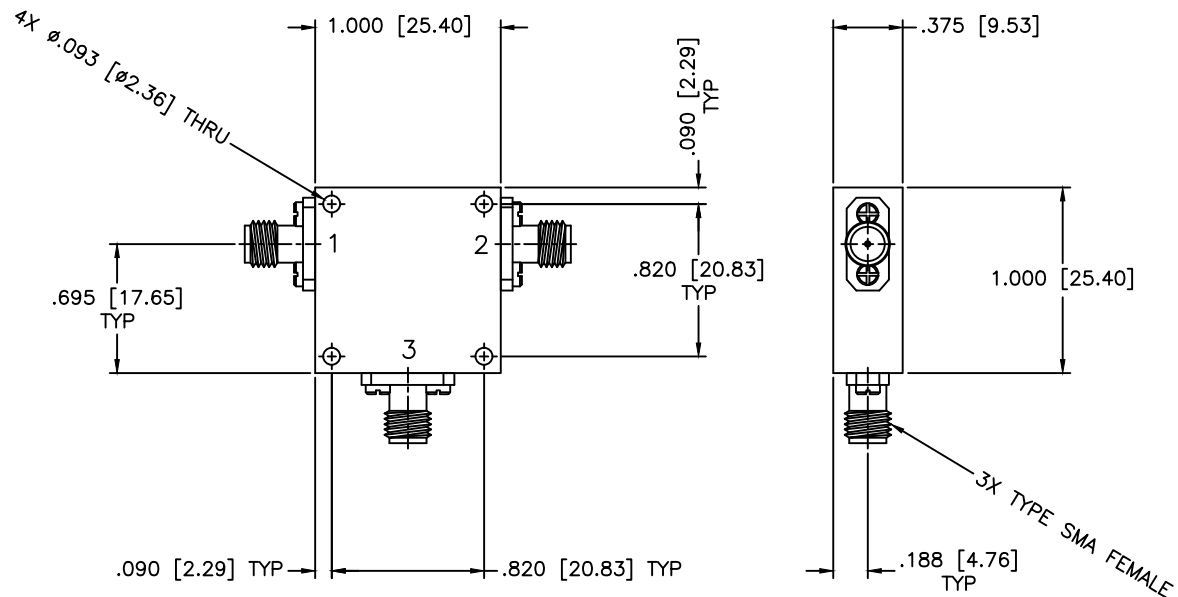

**SPECIFICATIONS**

- Frequency Range: 2.2–2.4 GHz
- Isolation: 20dB Min.
- Insertion loss: 0.50dB Max.
- VSWR: 1.25:1 Max.
- Operating Temperature: -54°C to +85°C
- Average Power: 50 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR		
DRAWN: Paiboon		PART NO.: CS-307		
DATE: 05-25-2010		CAGE CODE: OD2L5		
APPROVED: Peter Nguyen		DATE: 10-27-2023		
THIRD ANGLE PROJECTION		SIZE: N/A		
		REV: N/A		
		DWG NO.: 84878		
DO NOT SCALE THE DRAWING				