


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

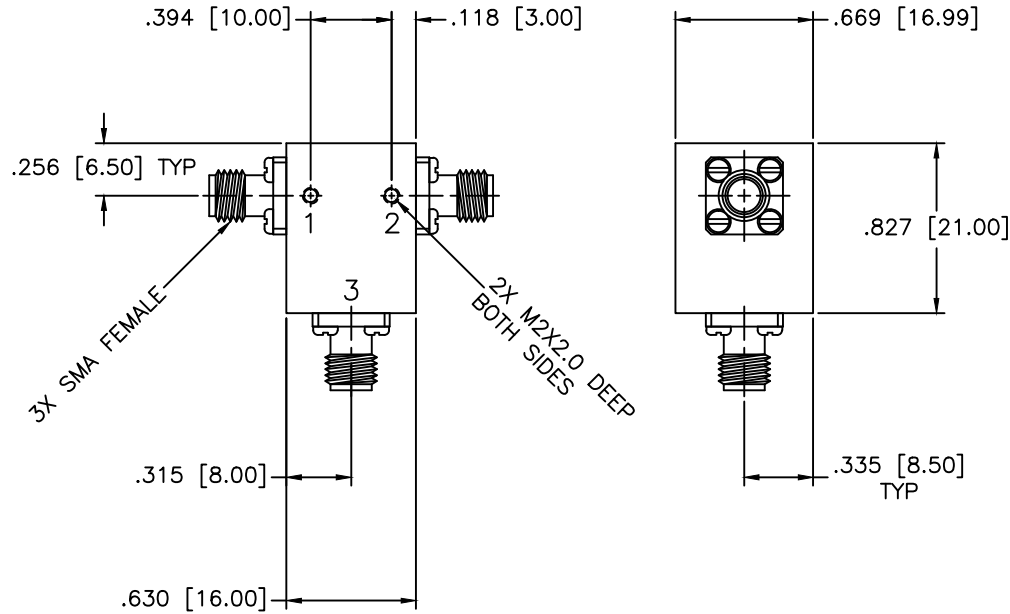

SPECIFICATIONS

Frequency Range: 7.5–9 GHz
 Isolation: 25dB Min.
 Insertion loss: 0.25dB Max.
 VSWR: 1.20:1 Max.
 Power Avg: 50 Watts
 Power Peak: 100 Watts
 Operating Temperature: 0°C to +50°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR		
DRAWN: Paiboon		PART NO.: CS-321		
DATE: 09-01-2011		CAGE CODE: OD2L5		
APPROVED: Peter Nguyen		DATE: 10-27-2023		
THIRD ANGLE PROJECTION		SIZE: N/A	REV: N/A	DWG NO.: 84885
		DO NOT SCALE THE DRAWING		