


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

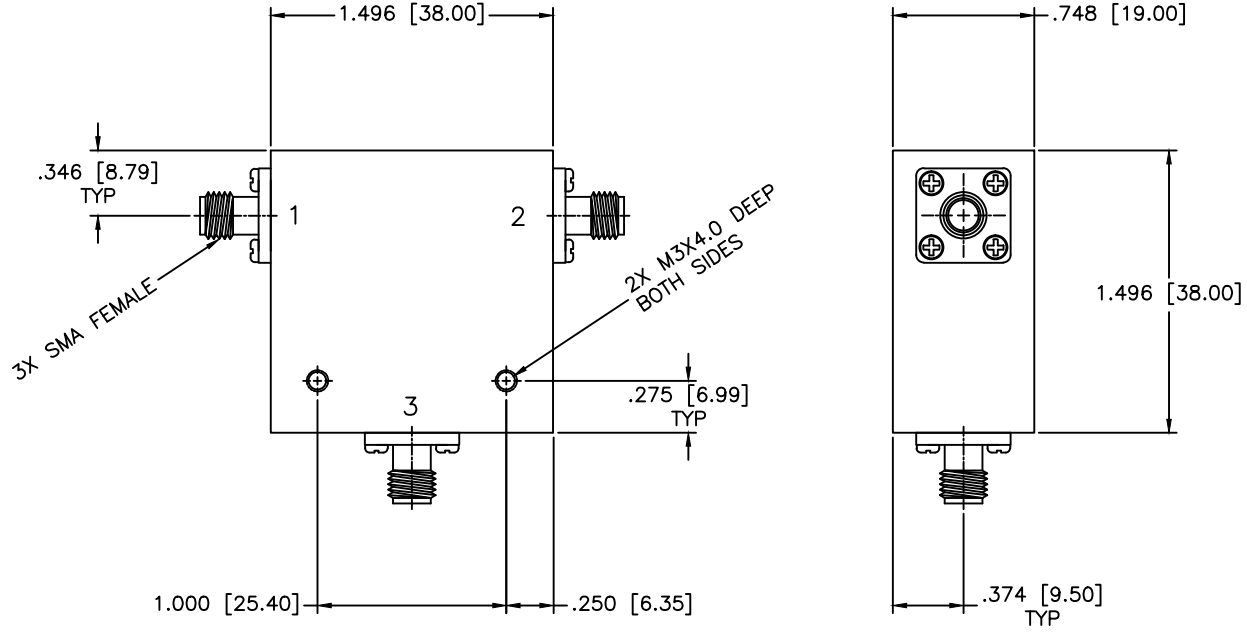

SPECIFICATIONS

- Frequency Range: 1–1.12 GHz
- Isolation: 20dB Min.
- Insertion loss: 0.3dB Max.
- VSWR: 1.50:1 Max.
- Power Avg: 50 Watts
- Power Peak: 100 Watts
- Operating Temperature: -0°C to +50°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR	
DRAWN: Paiboon		PART NO.: CS-324	
DATE: 09-14-2005		CAGE CODE: OD2L5	
APPROVED: Peter Nguyen		SIZE: N/A	REV: N/A
DATE: 10-27-2023		DWG NO.: 84882	
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		<small>THIRD ANGLE PROJECTION</small> 	
DO NOT SCALE THE DRAWING			