


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

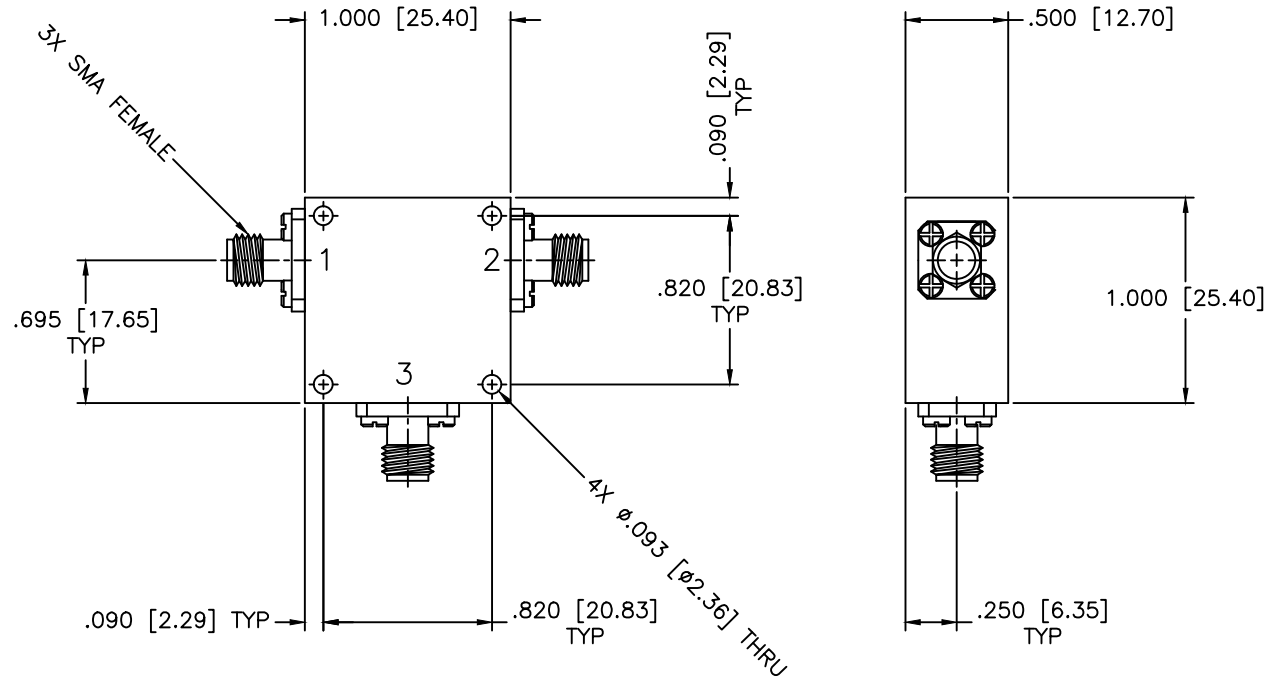

SPECIFICATIONS AT 25±5°C

Frequency Range: 1.2–1.6 GHz

Isolation: 18dB Min.

Insertion loss: 0.60dB Max.

VSWR: 1.35:1 Max.

Specifications From 0°C to +60°C

Isolation: 16dB Min.

Insertion loss: 0.70dB Max.

VSWR: 1.40:1 Max.

Circulator Power: 50 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR		
DRAWN: Paiboon		PART NO.: CS-326		
DATE: 09-03-1999		CAGE CODE: OD2L5		
APPROVED: Peter Nguyen		DATE: 10-27-2023		
THIRD ANGLE PROJECTION		SIZE: N/A	REV: N/A	DWG NO.: 84357
		DO NOT SCALE THE DRAWING		