


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

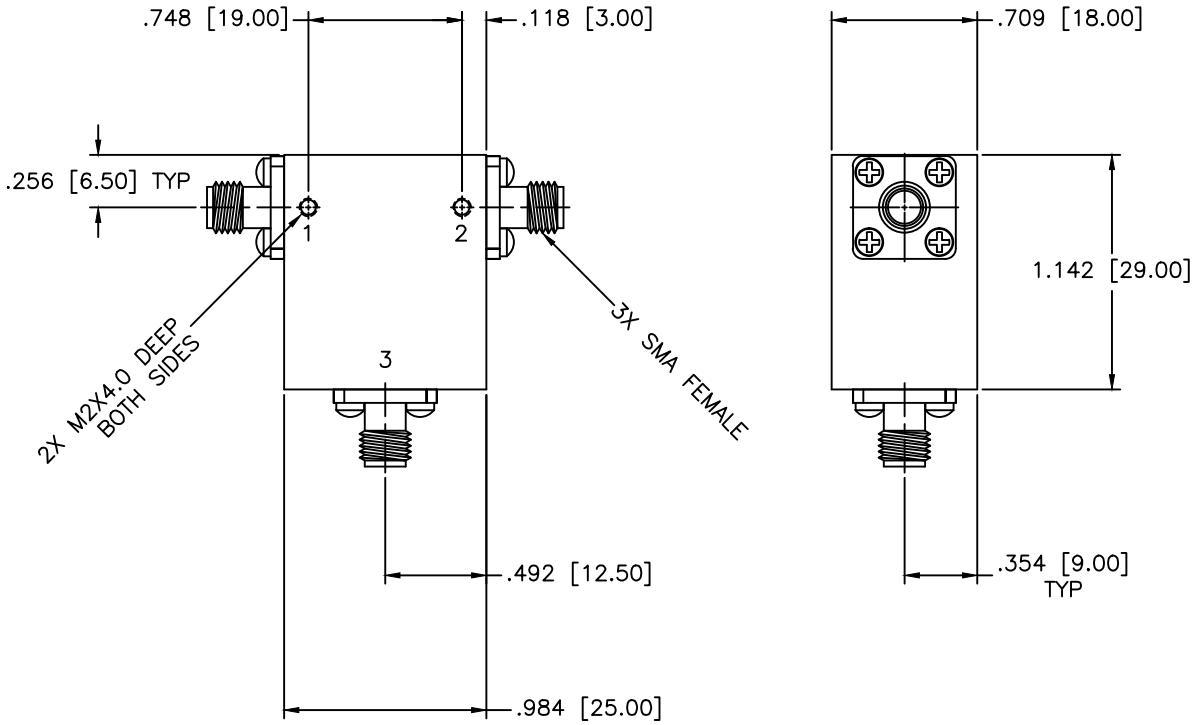

SPECIFICATIONS

Frequency Range: 4.9–5.8 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.4dB Max.
 VSWR: 1.25:1 Max.
 Operating Temperature: -54°C to +85°C
 Circulator Power: 25W Avg. / Peak 250W

MATERIAL:	
DRAWN: Paiboon	DATE: 10-07-2010
APPROVED: Peter Nguyen	DATE: 10-27-2023

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: COAXIAL CIRCULATOR		PART NO. CS-329	
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
		DWG NO. 85079 DO NOT SCALE THE DRAWING	